


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/24/09	

APPROVED: _____


DATE: _____ TITLE: _____

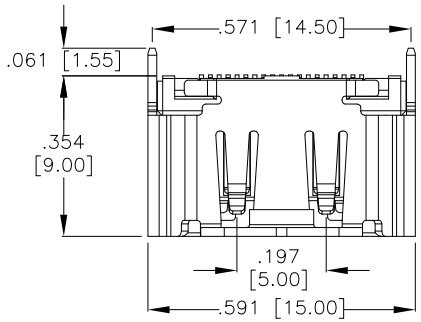


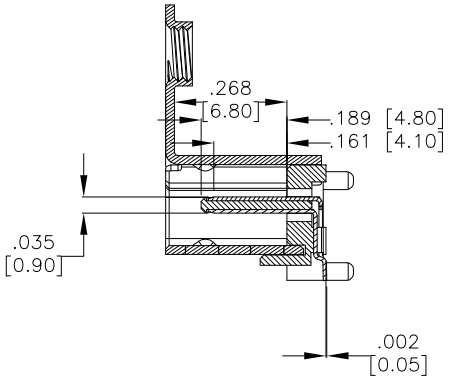




DTEAIL A
SCALE 10:1

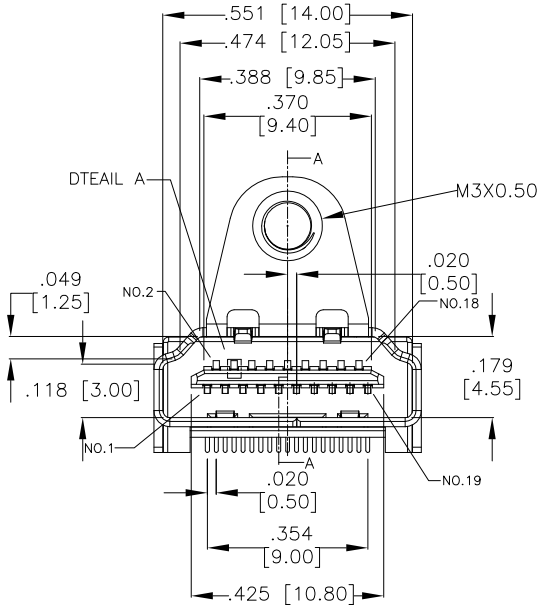

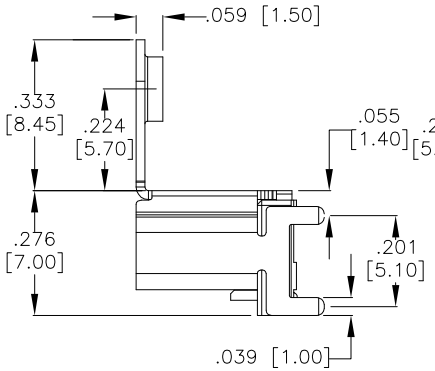

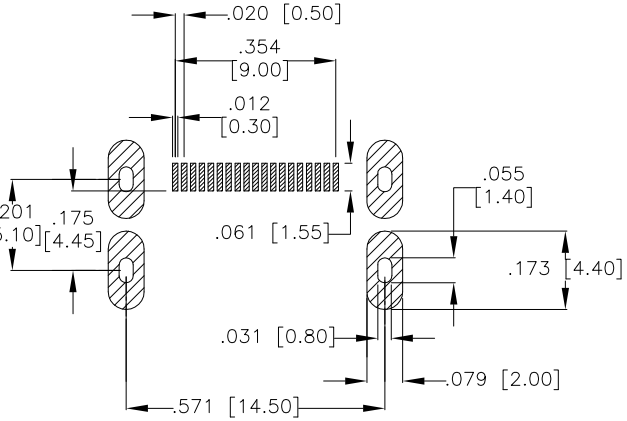

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:
Material:
Housing: Hi-temp thermoplastic, UL 94V-0
Housing color: Black
Contact: Phosphor Bronze
Shield: Brass
Plating:
15u" Gold over Nickel underplate on contact area,
Tin over Copper underplate on tails.
Electrical:
Voltage rating: 40V
Current rating: 0.5A
Dielectric strength: 500VAC for 1 minute min.
Insulation resistance: 100 Megohm min.
Contact resistance: 30 mohms max.
Environmental:
Lead free, RoHS Compliant
Recommended soldering temp: 260°C for 5 seconds.

RoHS COMPLIANT

PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	3/24/09
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: HDMI CONNECTOR WITH MOUNTING FLANGE TRUE SMT TYPE

SIZE	PART NO.	REV.
X	HDMI-S-V-TSMT-MF-15-T/R	-

REF: S00005C | SCALE: NTS | SHEET 1 OF 1