

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/6/14	


APPROVED: _____

DATE: _____ TITLE: _____

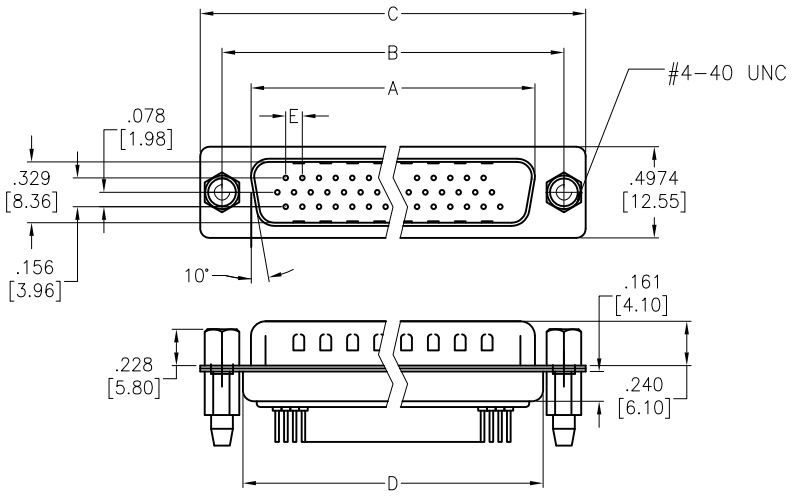





15 POSITION
RECOMMENDED PCB LAYOUT

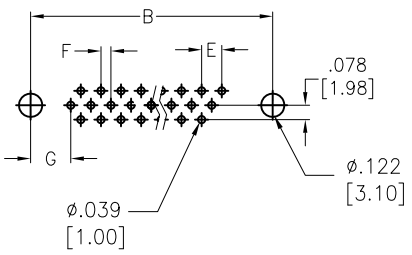

26, 44, 62 POSITION
RECOMMENDED PCB LAYOUT

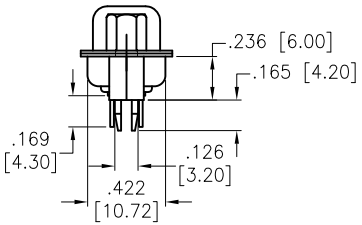

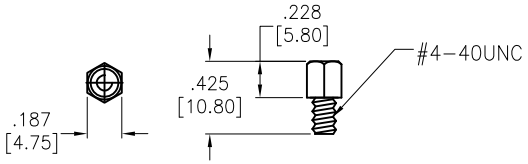

#4-40 unc screwlock installed

SPECIFICATIONS:
Material:
Insulator: PBT, glass reinforced, rated UL 94V-0
Insulator color: Black
Contacts: Copper Alloy
Shell: Steel, Tin plated
Clinch Nut: Brass, Nickel plated
Boardlock: Brass, Tin plated
Screwlock: Copper Alloy Nickel plated
Plating:
30u" Gold over Nickel underplate on contact area, Tin over Copper underplate on PCB tails
Electrical:
Operating voltage: 250 VAC max
Current rating: 3 Amps max
Contact resistance: 20 mohms max @ DC 100 mA
Insulation resistance: 1,000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 500 VAC for 1 minute
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions	DIMENSIONS						
	A	B	C	D	E	F	G
15	.666 [16.92]	.984 [24.99]	1.213 [30.81]	.756 [19.20]	.090 [2.29]	.045 [1.145]	.277 [7.04]
26	.994 [25.25]	1.311 [33.30]	1.543 [39.20]	1.091 [27.70]	.090 [2.29]	.045 [1.145]	.271 [6.88]
44	1.534 [38.96]	1.852 [47.04]	2.088 [53.04]	1.618 [41.10]	.090 [2.29]	.045 [1.145]	.271 [6.88]
62	2.182 [55.43]	2.500 [63.50]	2.732 [69.40]	2.256 [57.30]	.095 [2.41]	.047 [1.205]	.276 [7.00]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	6/6/14
CHECKED	LW	6/6/14
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
HIGH DENSITY D-SUB PLUG, PCB TAILS
RIVETED #4-40 STANDOFFS W/BOARDLOCKS

SIZE	PART NO.	REV.
X	HDTXX-PT-BL-JS-30	-

REF: S00087T | SCALE: NTS | SHEET 1 OF 1