
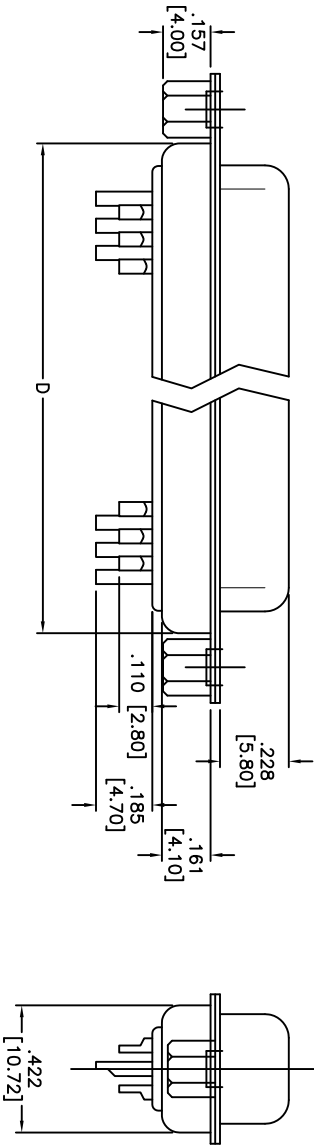


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/5/05	
A		REDRAWN	8/30/11	

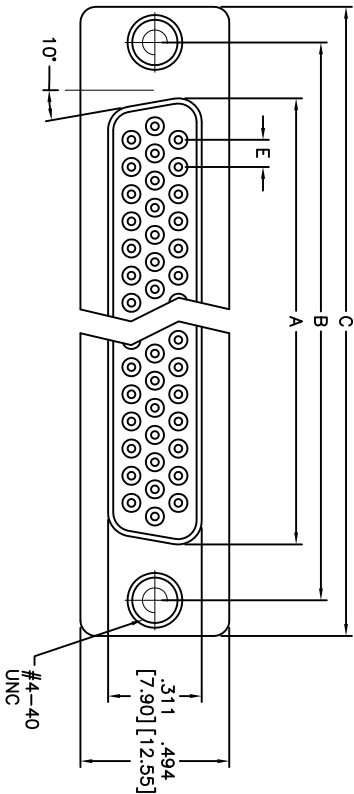

SPECIFICATIONS:

Material: Insulator: PBT, glass reinforced, rated UL 94V-0
Insulator color: Black
Contacts: Copper alloy
Shell: SPPC
Hardware: Brass, Nickel plated
Plating: Gold flash over Nickel underplate overall
Electrical: Operating voltage: 250 VAC max
Current rating: 1 Amps max
Contact resistance: 20 mohms max @ 500 VDC
Insulation resistance: 1,000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating: Operating temperature: -55°C to +85°C
Environmental: Lead free, RoHS compliant
Recommended soldering temp: 235°C for 5 seconds

HDTXX	DIMENSIONS				
	A	B	C	D	E
15	.643 [16.33]	.984 [24.99]	1.213 [30.81]	.756 [19.20]	.090 [2.29]
26	.971 [24.66]	1.312 [33.32]	1.541 [39.14]	1.091 [27.70]	.090 [2.29]
44	1.511 [38.38]	1.852 [47.04]	2.088 [53.04]	1.618 [41.10]	.090 [2.29]
62	2.159 [54.84]	2.500 [63.50]	2.729 [69.32]	2.256 [57.30]	.095 [2.41]

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

HIGH DENSITY D-SUB SOCKET
SOLDER CUP, RIVETED #4-40 CLINCH NUTS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES Holes .X ± .10 ØXX ± .10 .XX ± .020 ØXXX ± .015 .XXX ± .015 ØXXX ± .010		DATE		TITLE	
APPROVALS		DATE		HIGH DENSITY D-SUB SOCKET SOLDER CUP, RIVETED #4-40 CLINCH NUTS	
DRAWN	SS	5/5/05		SIZE	
CHECKED				X	
APPROVED				PART NO.	
				HDTXX-SD-SL	
				REV.	
				A	

