

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/2/14	
A		UPDATE DIM	1/13/22	WX/AY1


APPROVED: _____


DATE: _____ TITLE: _____

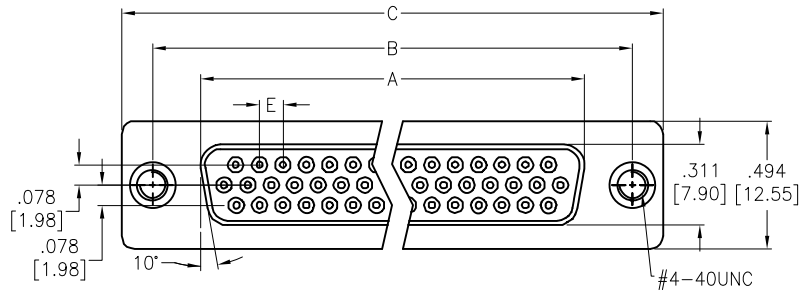


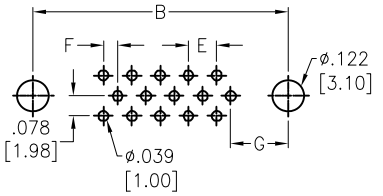

15 POSITION FEMALE
RECOMMENDED PCB LAYOUT

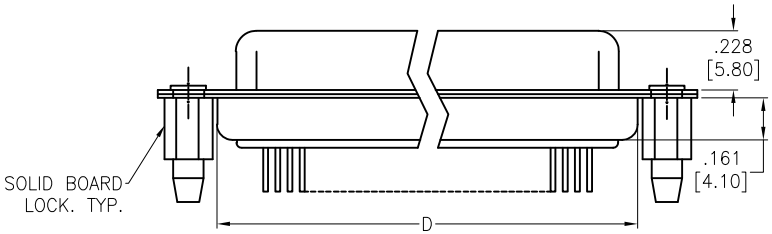

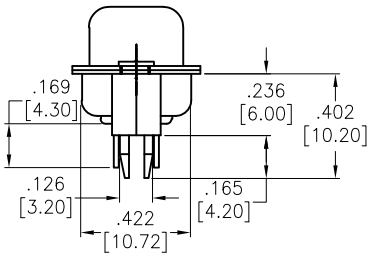

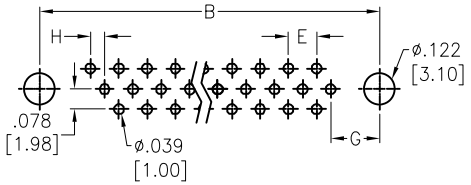

26, 44 & 62 POSITION FEMALE
RECOMMENDED PCB LAYOUT

Positions	A	B	C	D	E	F	G
15	.643 [16.33]	.984 [24.99]	1.213 [30.81]	.756 [19.20]	.090 [2.29]	.045 [1.145]	.277 [7.04]
26	.972 [24.70]	1.312 [33.32]	1.543 [39.20]	1.091 [27.70]	.090 [2.29]	.045 [1.145]	.271 [6.88]
44	1.512 [38.40]	1.852 [47.04]	2.089 [53.05]	1.618 [41.10]	.090 [2.29]	.045 [1.145]	.271 [6.88]
62	2.159 [54.84]	2.500 [63.50]	2.732 [69.40]	2.256 [57.30]	.095 [2.41]	.474 [1.205]	.276 [7.00]

SPECIFICATIONS:
Material:
Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Copper Alloy
Shell: Steel, Tin plated
Boardlock: Brass, Tin plated
Plating:
Gold flash over Nickel underplate on contact area
Electrical:
Voltage rating: 250 VAC/RMS
Current rating: 3 Amp
Contact resistance: 20 mohms max
Insulation resistance: 1,000 Mohms min @ 500V DC

Dielectric withstanding voltage: 500 VAC for 1 minute
Environmental:
Lead free, RoHS compliant RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	AY	9/2/14
CHECKED	CH	9/2/14
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
HIGH DENSITY D-SUB SOCKET, PCB TAILS
RIVETED #4-40 STANDOFFS W/BOARDLOCKS

SIZE	PART NO.	REV.
X	HDTXX-ST-BL-HT	A

REF:	SCALE:	SHEET
S00087T	NTS	1 OF 1