


APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	08/28/13	
A		REVISED DIM. & SPEC.	5/3/12	
B		REVISED DIM.	6/27/12	
C		UPDATED DRAWING	5/16/22	JJ/JC

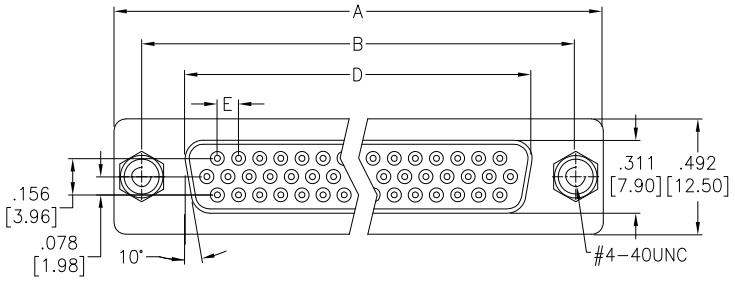


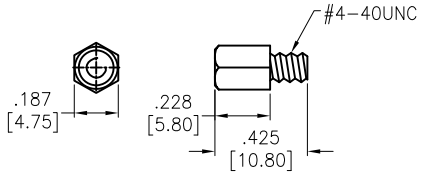


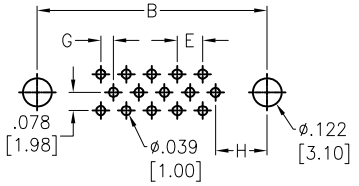

15P
RECOMMENDED PCB LAYOUT

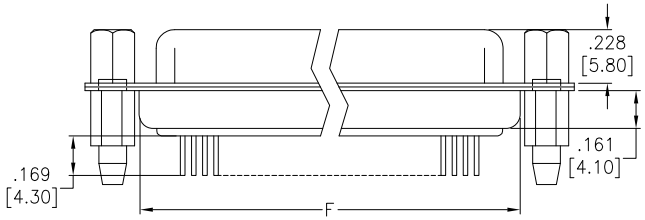



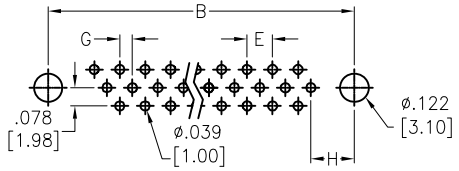

26P, 44P, 62P
RECOMMENDED PCB LAYOUT

SPECIFICATIONS:
Material:
Insulator: PBT, rated UL 94V-0
Insulator color: Black
Contacts: Copper alloy
Shell: Steel, Tin plated
Boardlock: Brass, Tin plated
Clinch Nut: Brass, Nickel plated
Screwlock: Steel, Nickel plated
Plating:
Gold over Nickel underplate on contact area,
Tin over Copper underplate on PCB tails
Electrical:
Voltage rating: 250 VAC
Current rating: 3 Amps
Contact resistance: 20 mohms
Insulation resistance: 1000 Mohms min at 500 VDC
Dielectric withstanding voltage: 500 VAC for 1 minute
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

Positions	A	B	D	E	G	H
15	1.213 [30.81]	.984 [24.99]	.643 [16.33]	.090 [2.29]	.045 [1.145]	.277 [7.04]
26	1.543 [39.20]	1.311 [33.30]	.972 [24.70]	.090 [2.29]	.045 [1.145]	.271 [6.88]
44	2.089 [53.05]	1.852 [47.04]	1.512 [38.40]	.090 [2.29]	.045 [1.145]	.271 [6.88]
62	2.732 [69.40]	2.500 [63.50]	2.157 [54.80]	.095 [2.41]	.047 [1.205]	.276 [7.00]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	SHIREN	12/10/07
CHECKED		
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: HIGH DENSITY D-SUB, STRAIGHT PCB TAIL SOCKET, RIVETED #4-40 JACKSCREW

SIZE	PART NO.	REV.
X	HDTXX-ST-BL-JS	C

REF:	SCALE:	SHEET
S00087T	NTS	1 OF 1