


APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	03/07/05	
A		REVISED DIM.	5/26/09	
B		REDRAWN	9/12/13	

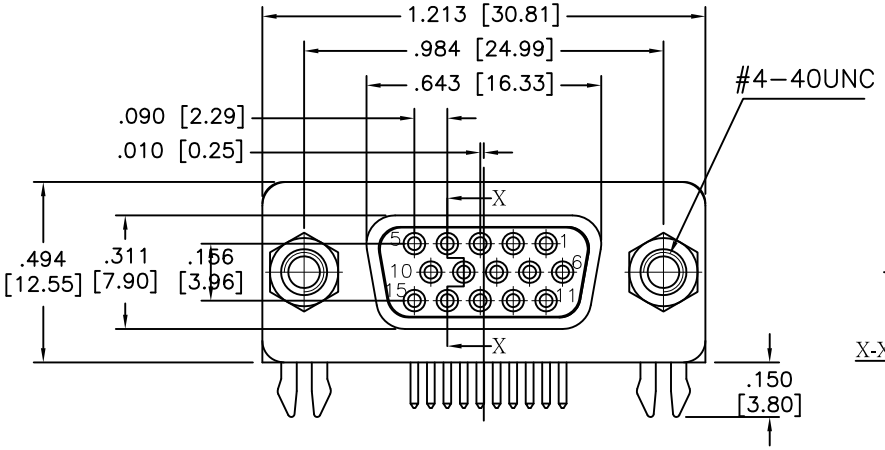



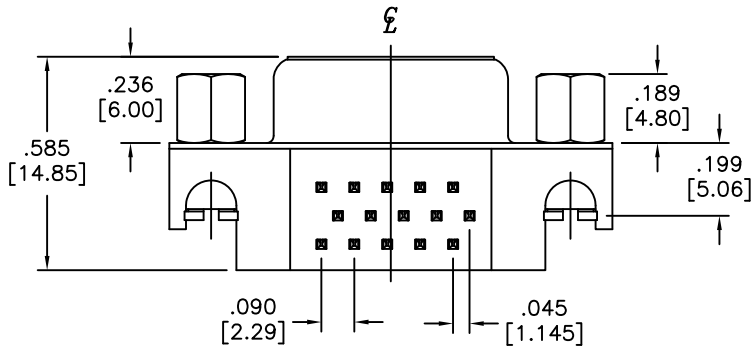

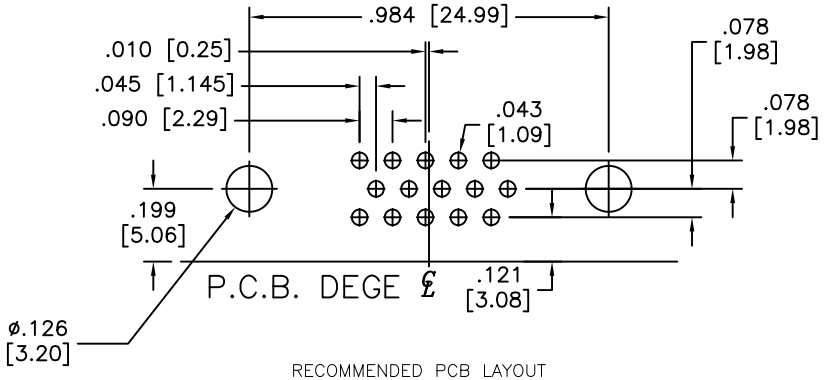

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:
Material:
Insulator: PBT, glass reinforced, rated UL 94V-0
Insulator color: Blue
Contacts: Copper Alloy
Shell: SPCC, Nickel plated
Boardlock: Copper Alloy, Tin plated
Rivet: Copper Alloy, Nickel plated
Screw: Copper Alloy, Nickel plated
Plating:
Gold flash over Nickel underplate on contact area,
Tin over Copper underplate on PCB tails
Electrical:
Operating voltage: 250 VAC max
Current rating: 3 Amps max
Contact resistance: 25 mohms max
Insulation resistance: 5,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
Operating temperature: -55°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	03/07/05
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: 15 POS. HIGH DENSITY VESA, RIGHT ANGLE FEMALE, SLIMLINE, PCB MOUNT

SIZE	PART NO.	REV.
X	HDVG-15-SL-C-SL	B

REF: S00027T | SCALE: NTS | SHEET 1 OF 1