
APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/2/05	
A		REDRAWN	12/29/11	
B		REDRAWN	1/20/12	
C		UPDATE POSITIONS	3/19/20	AY/AY1

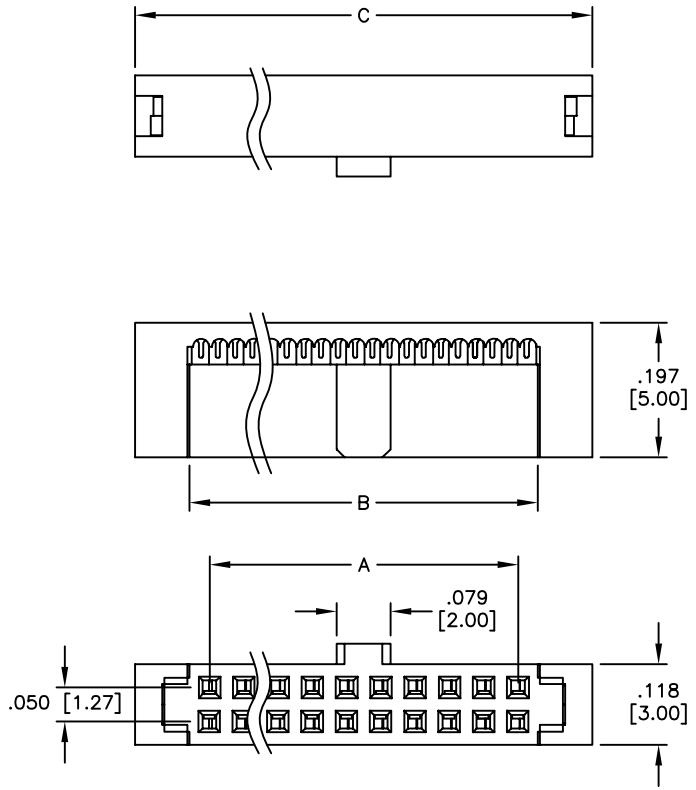

Positions: 10, 20
A = .050 [1.27] x No. of Spaces
B = .050 [1.27] x No. of Spaces + .058 [1.47]
C = .050 [1.27] x No. of Spaces + .217 [5.50]

SPECIFICATIONS:
Material:
Insulator: PBT, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Gold flash over Nickel underplate on contact area
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	6/2/05
CHECKED		
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.050 x .050 IDC SOCKET, LOW PROFILE
FOR SINGLE LAYER .025" FLAT CABLE

SIZE	PART NO.	REV.
X	HFCS-A-XX-G	C

REF:	SCALE:	SHEET
S00041T	NTS	1 OF 1