

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/09/08	


APPROVED: _____


DATE: _____ TITLE: _____

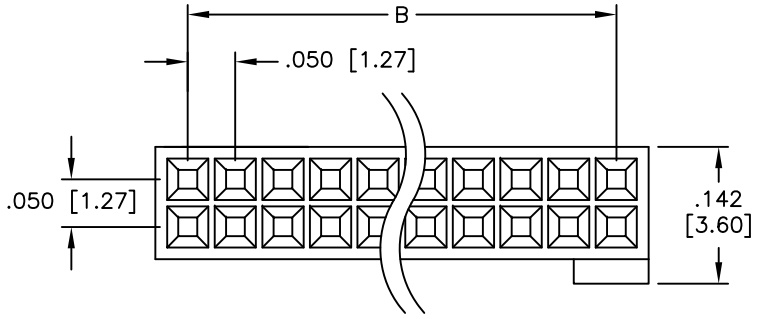

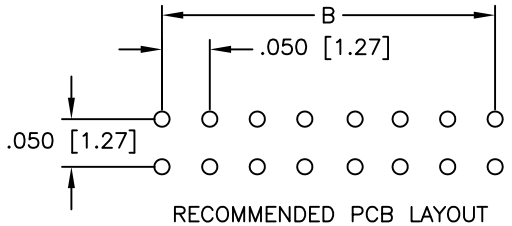

RECOMMENDED PCB LAYOUT

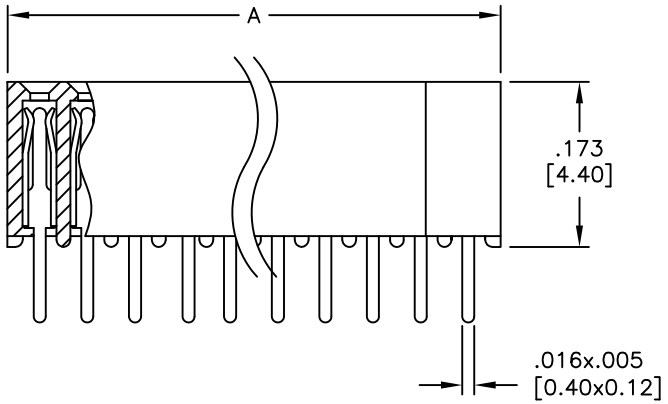

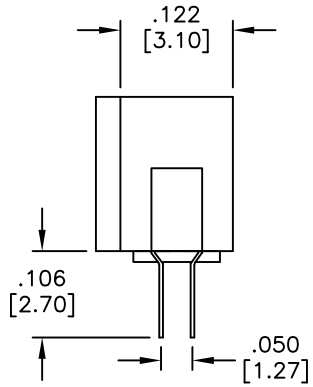

SPECIFICATIONS:

Material:
Insulator: Hi–temp thermoplastic, rated UL 94V–0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Gold flash over Nickel underplate overall.

Electrical:
Current rating: 1 Amp max
Contact resistance: 20 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 300 VAC for 1 minute

Temperature Rating:
Operating temperature: –40°C to +105°C

Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

A = .050 [1.27] X No. of Positions Per Row+.014 [0.35]
B = .050 [1.27] X No. of Spaces Per Row

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	10/09/08
CHECKED	AY	8/12/10
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.050 [1.27] PITCH SHROUDED FEMALE HEADER
DUAL ROW DIP TYPE, GOLD PLATED

SIZE	PART NO.	REV.
X	HFH-XX-G	-

REF: | SCALE: NTS | SHEET 1 OF 1