

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/13/14	


APPROVED: _____

DATE: _____ TITLE: _____

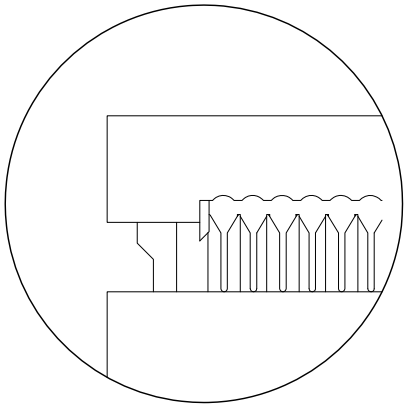

DETAIL A

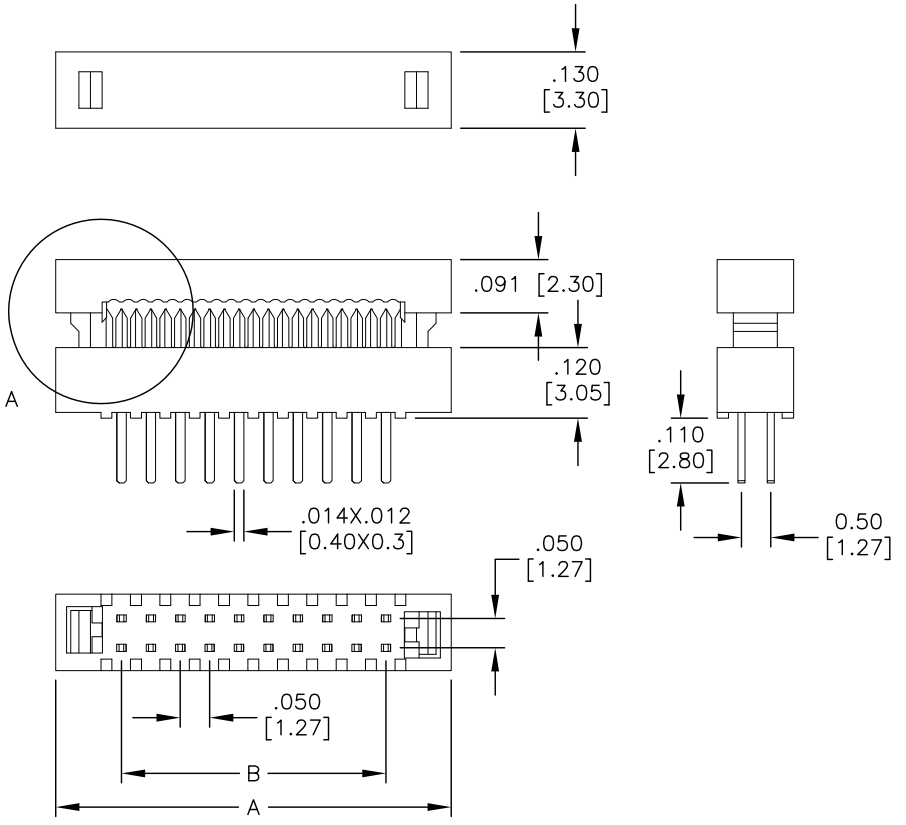

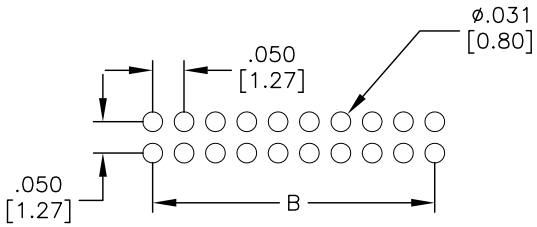

RECOMMENDED PCB LAYOUT

Positions: 6, 8, 10, 12, 14, 16, 20, 24, 26, 30, 34, 40, 50, 60, 68
A = .050 [1.27] x No. of Spaces + .223 [5.66]
B = .050 [1.27] x No. of Spaces

SPECIFICATIONS:
Material:
Insulator: PBT, glass reinforced, rated UL 94V–0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
T=Tin over Copper underplate overall
G=Gold flash over Nickel underplate overall
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	1/13/14
CHECKED	YC	1/13/14
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.050 [1.27] X .050 [1.27] DIP PLUG CONNECTOR
FOR SINGLE LAYER .025" [0.635mm] FLAT CABLE

SIZE	PART NO.	REV.
X	HFTR-XX-X	-

REF:	SCALE:	SHEET
S00041T	NTS	1 OF 1