
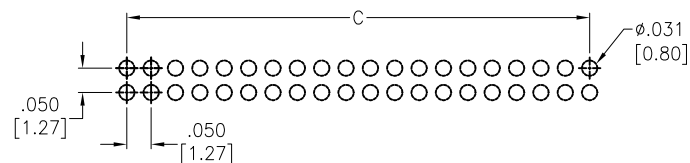




APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/7/08	SS
A		REDRAWN	8/14/12	SS
B		ADDED DIM.	04/12/13	
C		UPDATE DRAWING	8/5/20	AY/KL

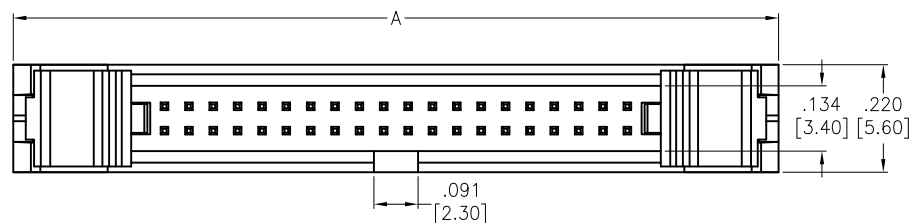

RECOMMENDED P.C.B LAYOUT

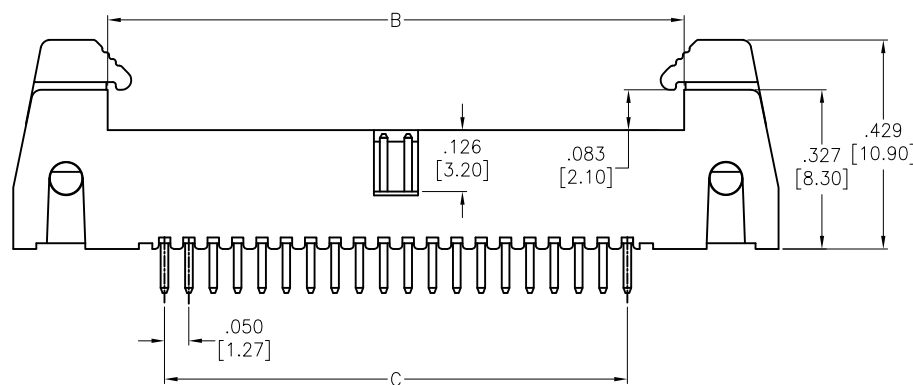

SPECIFICATIONS:

Material:

Insulator: (LCP) Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold Flash over Nickel underplate overall

Electrical:

Current rating: 1.0 Amp max

Insulation resistance: 1,000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 600 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +105°C

Environmental:

Lead free, RoHS Compliant



Positions: 6, 10, 12, 14, 16, 20, 26, 30, 34, 40, 44, 50, 60, 64, 66, 68

A = .050 [1.27] X No. of Spaces + .621 [15.77]

B = .050 [1.27] X No. of Spaces + .233 [5.92]

C = .050 [1.27] X No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

APPROVALS		DATE
DRAWN	SS	7/7/08
CHECKED		
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.050 [1.27] SHROUDED HEADER W/ LATCHES,
VERTICAL, PCB TYPE, GOLD PLATED

SIZE X	PART NO. HMHR-A-XX-VUAS	REV. C
REF: S00034T	SCALE: NTS	SHEET 1 OF 1