
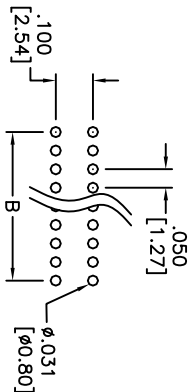
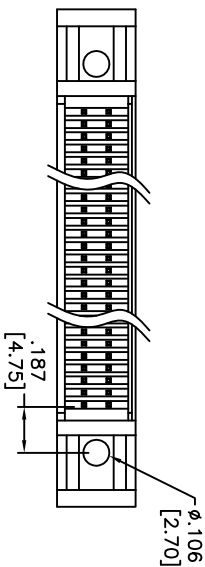

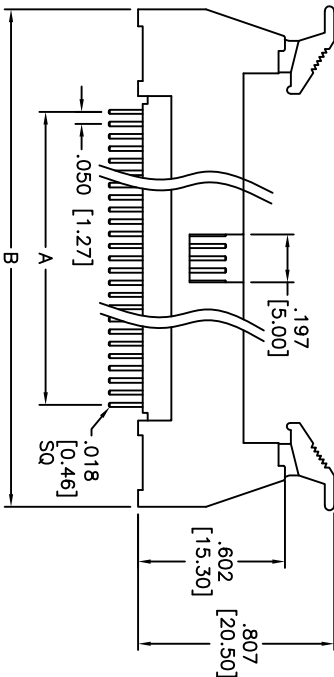


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/6/11	
A		REVISED DIM.	4/15/14	AY

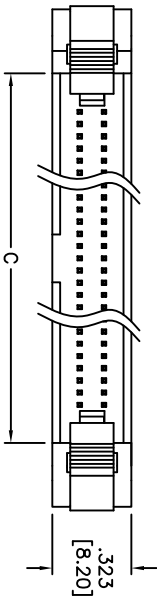

SPECIFICATIONS:

Material: Insulator: PBT, Glass reinforced, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating: Gold Flash over Nickel underplate overall
Electrical: Operating voltage: 250 VAC max
Current rating: 1 Amp max
Contact resistance: 30 mohms min
Insulation resistance: 1,000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating: Operating temperature: -40°C to +105°
Environmental: Lead free, RoHS Compliant

Positions: 10, 16, 26, 30, 32, 34, 40, 44, 50, 52, 60, 68, 70, 80, 100
A = .050 [1.27] x No. of Spaces
B = .050 [1.27] x No. of Spaces + .830 [21.07]
C = .050 [1.27] x No. of Spaces + .306 [7.78]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED INCHES			Holes		
.X	± .10	ØXX	± .10		
.XX	± .020	ØXXX	± .015		
.XXX	± .015	ØXXX	± .010		
APPROVALS			DATE		
DRAWN	AY		7/6/11		
CHECKED	AH		7/6/11		
APPROVED					
TITLE			THRU HOLE, GOLD PLATED, SHORT		
.050" X .100" LATCH BOX HEADER, STRAIGHT					
909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710					
SIZE			PART NO.		
X			HIMHR-XX-VUAS		
REV.			A		