

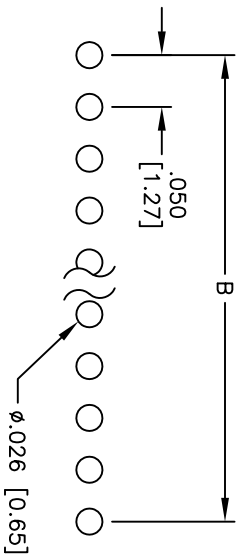
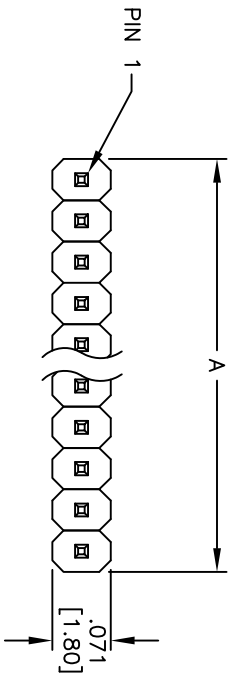


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	2/7/12	
A		REVISED SPEC.	7/31/13	



RECOMMENDED PCB LAYOUT

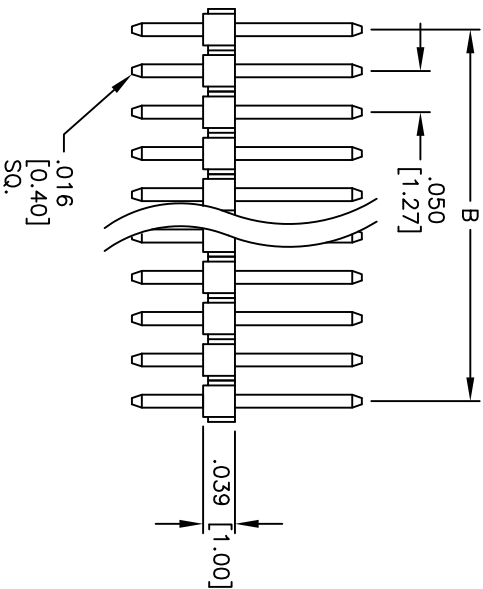

SPECIFICATIONS:

Material: HI-temp thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating: Tin over Copper underplate overall
Electrical:
Current rating: 1 Amp max.
Contact resistance: 20 mohms max. initial
Insulation resistance: 5,000 Mohms min.
Dielectric withstanding voltage: 500 VAC for 1 minute
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant

Positions: 02 thru 50
A = .050 [1.27] x No. of Positions Per Row
B = .050 [1.27] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES	
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010

ADAM TECH	
909 Railway Avenue, Union, NJ 07083	
Phone: 908-687-5000 Fax: 908-687-5710	
TITLE	
.050 [1.27] SINGLE ROW PIN HEADER	

APPROVALS	DATE	SIZE	PART NO.	REV.
DRAWN	AY	2/7/12	HPH1-A-XX-TA	-
CHECKED	AH	2/7/12		
APPROVED				



ADAM TECH

909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

.050 [1.27] SINGLE ROW PIN HEADER

HPH1-A-XX-TA

SCALE: NTS

SHEET 1 OF 1