

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/31/17	
A		ADDED DIM.	8/2/17	AY/DH
B		REVISED DIM.	8/21/17	AY/DH
C		UPDATE SPEC.	9/25/17	AY/DH

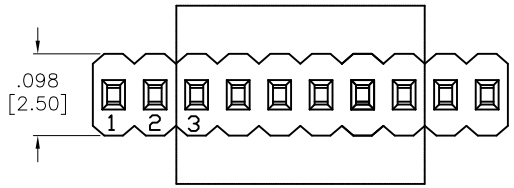

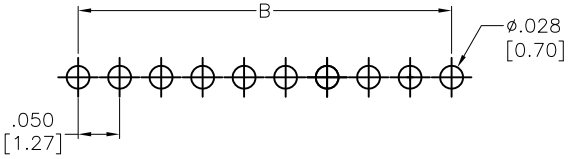

RECOMMENDED P.C.B LAYOUT

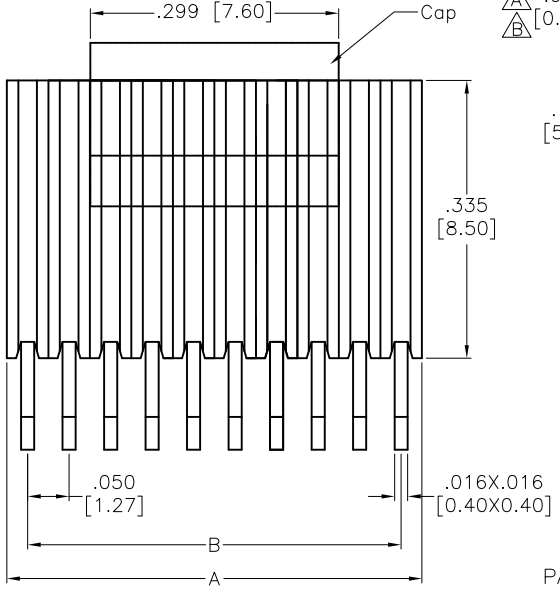

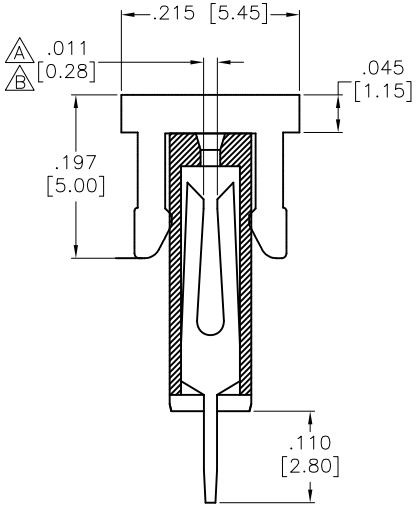

SPECIFICATIONS:
Material:
Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Gold flash over Nickel underplate overall
Electrical:
Current rating: 1 Amp.
Contact resistance: 20 mohms max.
Insulation resistance: 1000 Mohms min
Dielectric withstanding voltage: 500 VAC
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

PACKAGED ON TAPE & REEL

Positions: 01 thru 50
A = .050 [1.27] x No. of Positions
B = .050 [1.27] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	5/31/17
CHECKED	DH	5/31/17
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .050 [1.27] SINGLE ROW RECEPTACLE STRIP STANDARD PROFILE, GOLD PLATED

SIZE	PART NO.	REV.
X	HRS-1A-XX-GA-PP-T/R	C

REF: S00111C | SCALE: NTS | SHEET 1 OF 1