

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/5/18	
A		UPDATE SPEC.	12/22/20	LH/TY
B		UPDATE DIM.	3/20/24	LH/YC



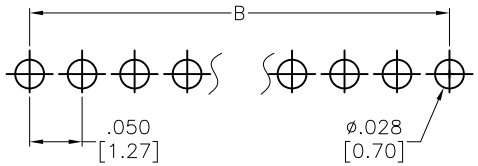

RECOMMENDED PCB LAYOUT

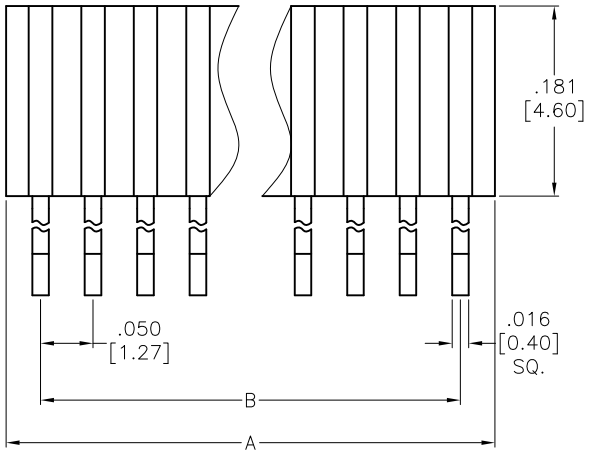



SPECIFICATIONS:
Material:
Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Gold flash over Nickel underplate overall
Electrical:
Current rating: 1 Amp
Contact resistance: 20 mohms max
Insulation resistance: 1,000 Mohms min.
Dielectric withstanding voltage: 500 VAC For 1 Minute
Temperature Rating:
-40°C to +105°C
Environmental:
Lead free, RoHS compliant RoHS COMPLIANT

Positions: 01 thru 50
A = .050 [1.27] x No. of Positions + .016 [0.40] (B)
B = .050 [1.27] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	HR	3/5/18
CHECKED	IC	3/5/18
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .050 [1.27] SINGLE ROW RECEPTACLE STRIP LOW PROFILE, GOLD PLATED

SIZE	PART NO.	REV.
X	HRS-1BY-XX-GA	B

REF: S00111C | SCALE: NTS | SHEET 1 OF 1