
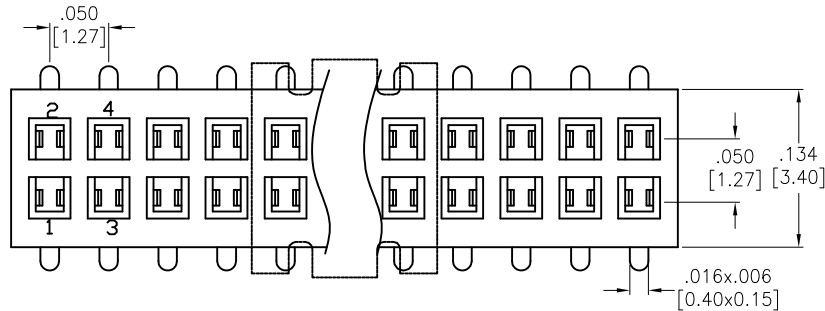
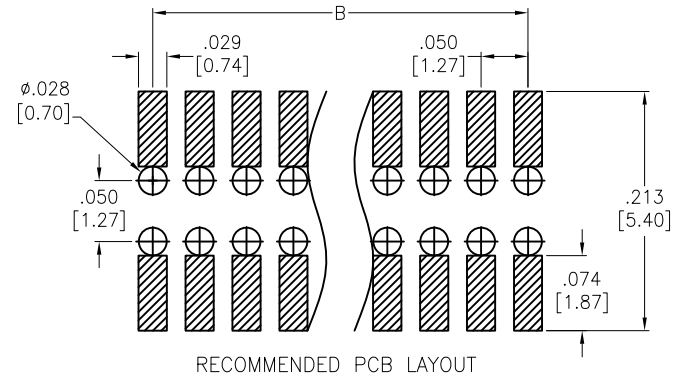
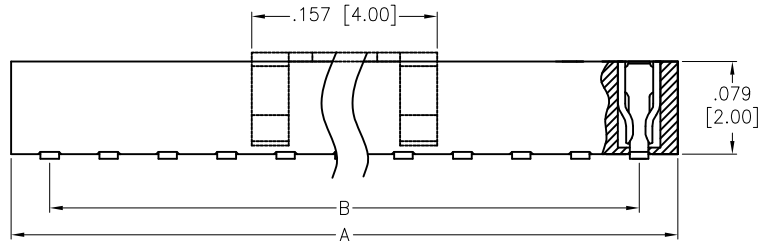


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/31/20	
A		UPDATE DRAWING	3/25/20	OW/LW
B		UPDATE TEMPERATURE RATING	1/14/21	LH/LW
C		ADDED SPEC.	5/5/22	LH/LW
D		UPDATE DRAWING	1/11/23	LH/RL

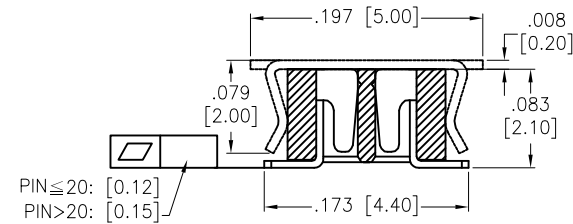

SPECIFICATIONS:

Material:
 Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper Alloy
 Plating:
 Gold flash over Nickel underplate overall
 Electrical:
 Current rating: 1 Amp
 Contact resistance: 20 mohms max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating:
 -40°C to +125°C
 Environmental:
 Lead free, RoHS compliant



PACKAGED ON TAPE & REEL

Positions: 04 thru 100

A = .050 [1.27] x No. of Positions per Row + .016 [0.40]

B = .050 [1.27] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED			<div>ADAM TECH</div> <div>909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710</div>		
INCHES		HOLES			
.X ± .10	Ø.X ± .10				
.XX ± .020	Ø.XX ± .015				
.XXX ± .015	Ø.XXX ± .010				
DRAWN	AY	1/31/20	TITLE .050 [1.27] DUAL ROW RECEPTACLE STRIP .079 HEIGHT, GOLD PLATED, SMT TYPE		
CHECKED	LW	1/31/20			
APPROVED					
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH			SIZE X	PART NO. HRS-2BEY-XX-G-SMT-PP1-T/R	REV. D
REF:		S00111C	SCALE: NTS		SHEET 1 OF 1