

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	03/23/05	
A		REDRAWN	12/25/08	
B		REDRAWN	4/21/14	AY/NP
C		UPDATED DIM.	1/22/18	HR/KC
D		UPDATE DRAWING	7/17/19	OW/YC

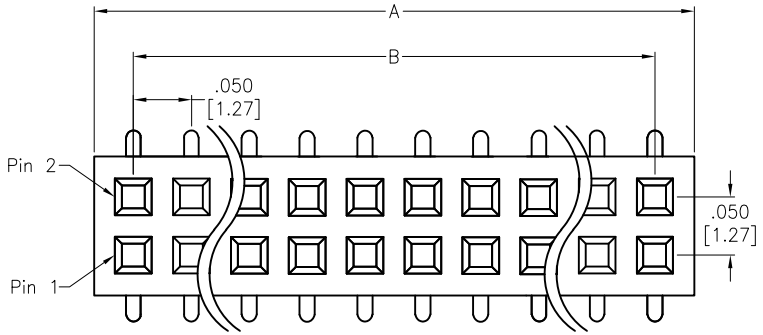

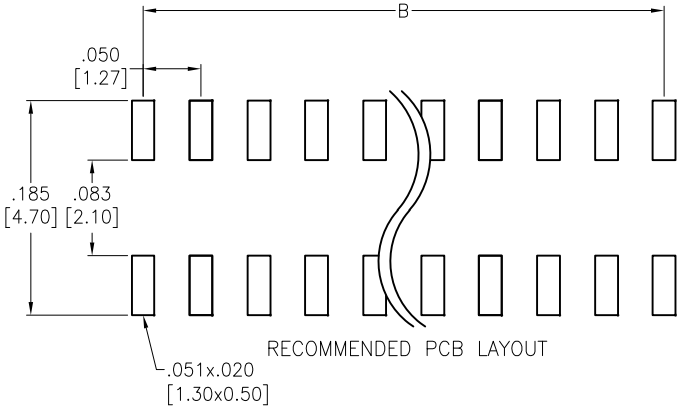

RECOMMENDED PCB LAYOUT

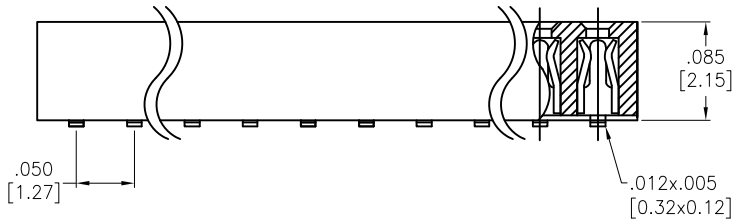

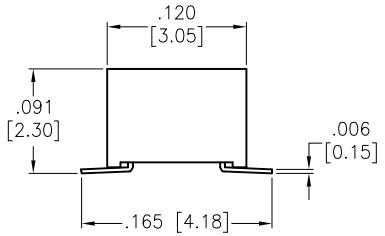

SPECIFICATIONS:
Material:
Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Gold flash over Nickel underplate overall
Electrical:
Current rating: 1 Amp
Contact resistance: 20 mohms max
Insulation resistance: 5000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

Positions: 06 thru 100
A = .050 [1.27] X No. of Positions + .018 [0.46]
B = .050 [1.27] X No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	03/23/05
CHECKED		
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .050" x .050" DUAL ROW RECEPTACLE STRIP
.079 [2.00] HEIGHT, BOTTOM ENTRY, SMT

SIZE	PART NO.	REV.
X	HRS-2C-XX-G-SMT	D

REF: S00059T | SCALE: NTS | SHEET 1 OF 1