


APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	2/8/12	
A		REVISED SHAPE	4/21/14	AY/NP
B		REVISED SHAPE	3/9/17	AY/AT
C		UPDATED DIM.	1/22/18	HR/KC
D		UPDATE DRAWING	7/17/19	OW/YC

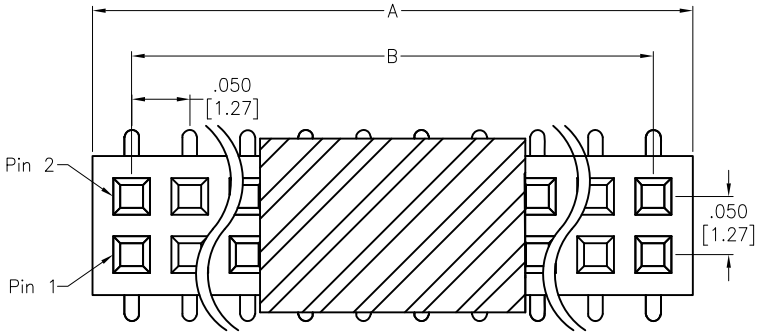

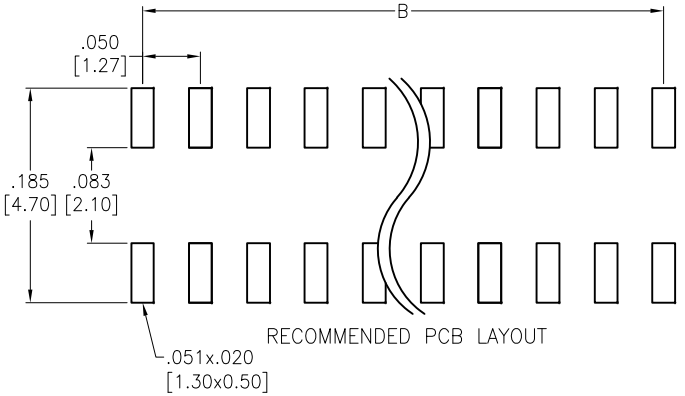

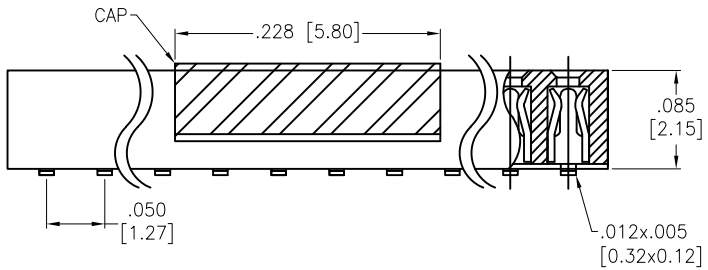

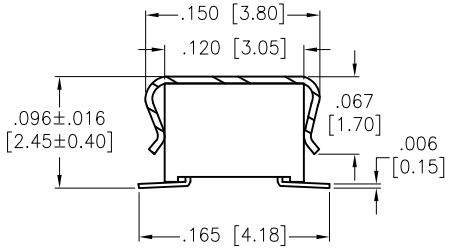

SPECIFICATIONS:
Material:
Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Gold flash over Nickel underplate overall
Electrical:
Current rating: 1 Amp
Contact resistance: 20 mohms max
Insulation resistance: 5000 Mohms min
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

PACKAGED ON TAPE & REEL
Positions: 06 thru 100
A = .050 [1.27] X No. of Positions + .018 [0.46]
B = .050 [1.27] X No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	2/8/12
CHECKED	OC	2/8/12
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.050" RECEPTACLE STRIP, DUAL ROW, SMT
.085" INSULATOR HEIGHT, GOLD PLATED

SIZE	PART NO.	REV.
X	HRS-2C-XX-G-SMT-PP-T/R	D

REF: S00059T | SCALE: NTS | SHEET 1 OF 1