
APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/17/08	
A		REVISED LAYOUT	04/19/13	
B		UPDATE DRAWING	10/19/17	AY/DH

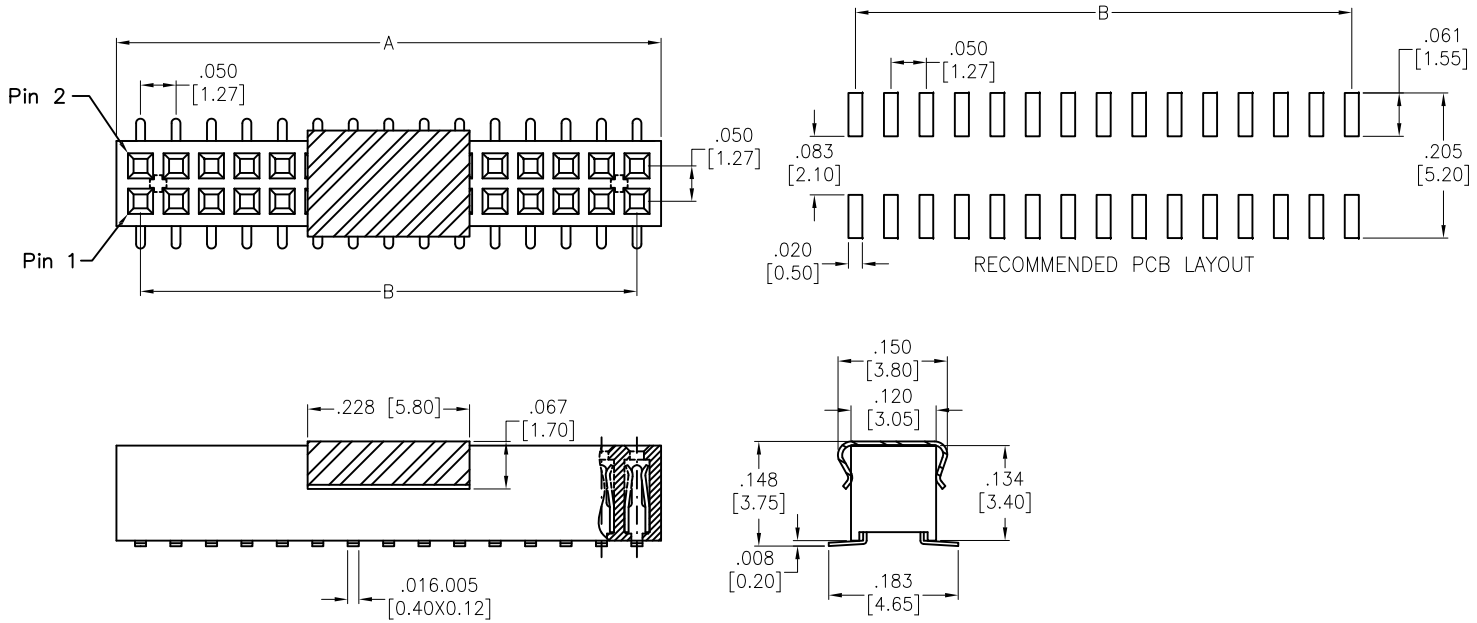

SPECIFICATIONS:
Material:
Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Gold flash over Nickel underplate overall.
Electrical:
Current rating: 1 Amp.
Contact resistance: 20 mohms max.
Insulation resistance: 5,000 Mohms min.
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

PACKAGED ON TAPE & REEL

Positions: 04 thru 100
A = .050 [1.27] x No. of Positions per Row + .018 [0.46]
B = .050 [1.27] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	7/17/08
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .050 x .050 DUAL ROW RECEPTACLE STRIP
.134 [3.40] HEIGHT, SURFACE MOUNT

SIZE	PART NO.	REV.
X	HRS-2E-XX-G-SMT-PP-T/R	-

REF: S00059T | SCALE: NTS | SHEET 1 OF 1