

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/28/16	


APPROVED: _____

DATE: _____ TITLE: _____

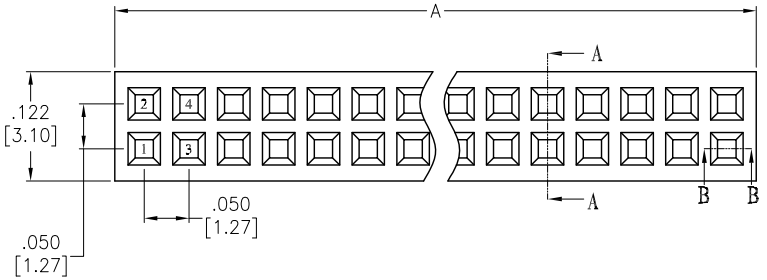


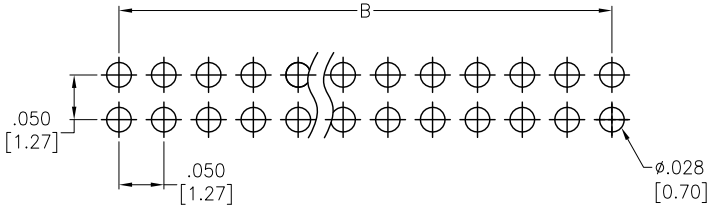

RECOMMENDED PCB LAYOUT

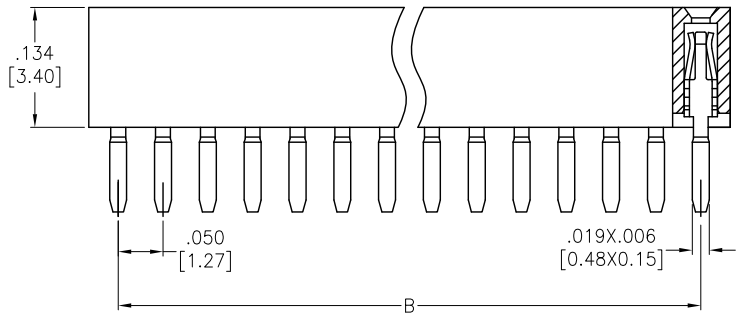

SECTION B–B



SECTION A–A

SPECIFICATIONS:
Material:
Insulator: Hi–temp thermoplastic, rated UL 94V–0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Gold flash over Nickel underplate overall
Electrical:
Current rating: 1.0 Amp.
Contact resistance: 20 mohms max.
Insulation resistance: 1,000 Mohms min.
Dielectric withstanding voltage: 500 VAC/DC for 1 minute
Temperature Rating:
Operating temperature: –40°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 04 thru 100
A= .050 [1.27] x No. of Positions per Row + .016 [0.40]
B= .050 [1.27] x No. of Space

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	4/28/16
CHECKED	OC	4/28/16
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .050 x .050 DUAL ROW RECEPTACLE STRIP
.134 [3.40] HEIGHT, DIP TYPE

SIZE	PART NO.	REV.
X	HRS-2EW-XX-GA	-

REF: S00019C | SCALE: NTS | SHEET 1 OF 1