
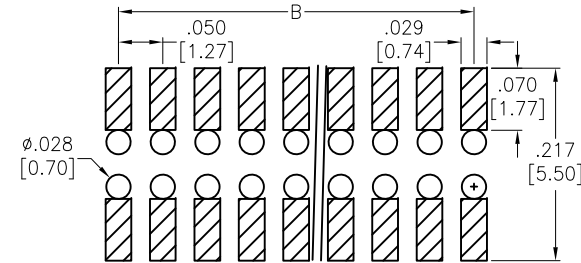
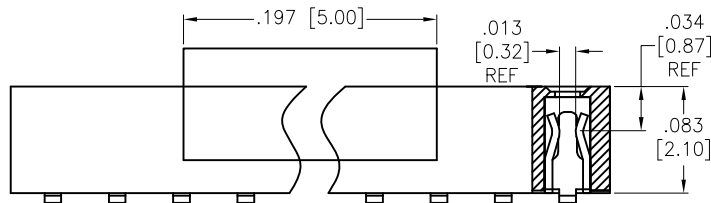



APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/19/17	
A		UPDATE DRAWING	9/8/21	LH/EY
B		UPDATE DRAWING	8/8/22	WX/YC

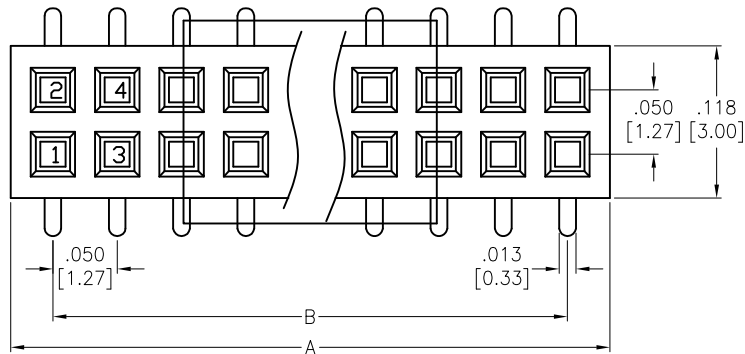

RECOMMENDED PCB LAYOUT

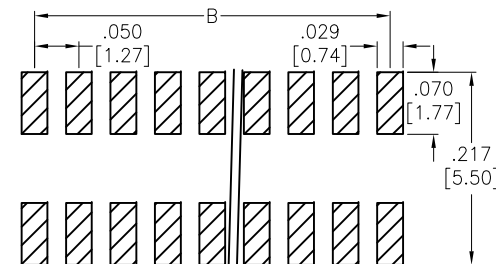

RECOMMENDED PCB LAYOUT

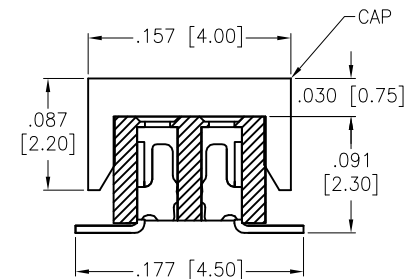

PIN > 20PIN	0.15
20PIN ≥ PIN > 10PIN	0.12
10PIN ≥ PIN	0.10

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Copper Alloy

Plating:

Gold flash over Nickel underplate overall

Electrical:

Current rating: 1.0 Amp.

Contact resistance: 20 mohms max.

Insulation resistance: 1,000 Mohms min.

Dielectric withstanding voltage: 500 VAC for minute

Temperature Rating:

-40°C to +105°C

Environmental:

Lead free, RoHS compliant



PACKAGED ON TAPE & REEL

Positions: 04 thru 100

A = .050 [1.27] x No. of Positions + .016 [0.40]

B = .050 [1.27] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

DRAWN	AY	12/19/17
CHECKED	KC	12/19/17
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .050 [1.27] DUAL ROW RECEPTACLE STRIP
.083 [2.10] HEIGHT, GOLD PLATED, SMT TYPE

SIZE	PART NO.	REV.
X	HRS-2LY-XX-G-SMT-PP-T/R	B

REF:	S00111C	SCALE:	NTS	SHEET	1 OF 1
------	---------	--------	-----	-------	--------