
APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/16/11	
A		UPDATE DRAWING	8/29/22	LH/LX
B		UPDATE DIM.	9/27/22	LH/JC

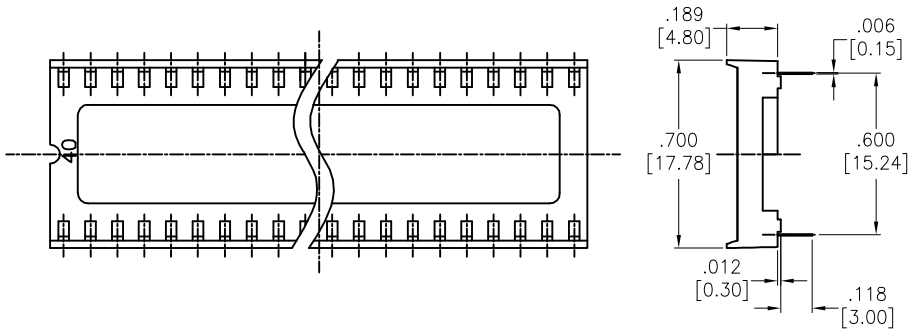

SPECIFICATIONS:
Material:
Insulator: PBT, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Tin over Copper underplate overall
Electrical:
Contact resistance: 20 mohms max initial
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 500 VAC (rms) for 1 minute
Temperature Rating:
-20°C to +105°C
Environmental:
Lead free, RoHS compliant RoHS COMPLIANT

Positions: 24, 28, 32, 40, 42
A = .100 [2.54] x No. of Spaces + .100 [2.54]
B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	AY	9/16/11
CHECKED	AH	9/16/11
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: IC SOCKET, .600" ROW SPACING, TIN PLATED OPEN FRAME WITHOUT CENTER BAR

SIZE	PART NO.	REV.
X	ICS-6XX-T-OF	B

REF: S00099C | SCALE: NTS | SHEET 1 OF 1