


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/17/10	


APPROVED: _____


DATE: _____ TITLE: _____

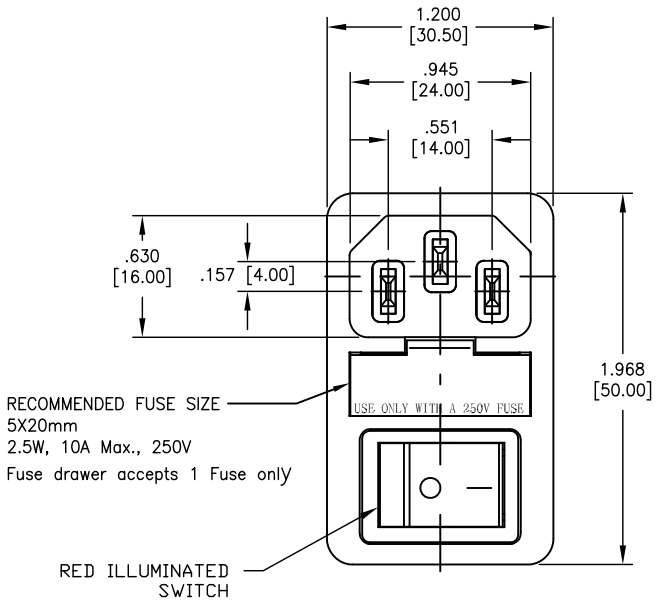

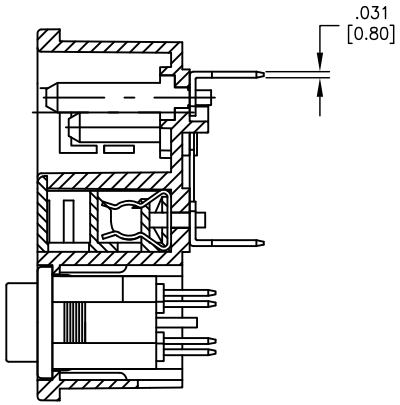

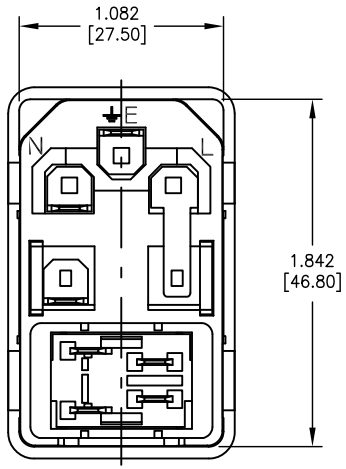

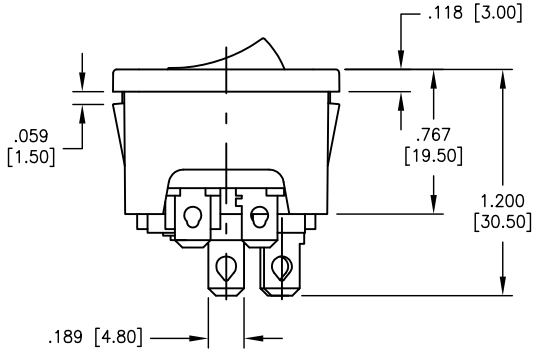

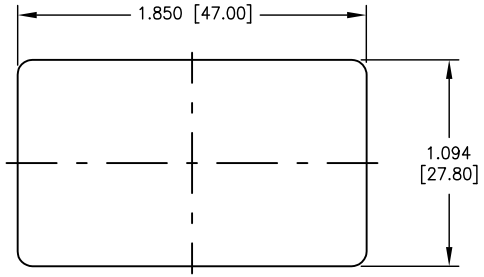

PANEL CUT–OUT

SPECIFICATIONS:
Material:
Insulator: Thermoplastic, rated UL 94V–0
Insulator color: Black
Contacts: Brass
Plating:
Tin over Copper underplate
Electrical:
Operating voltage: 250 VAC max
Current rating: 15 Amps max (cUL)
10 Amps max (VDE)
Insulation resistance: 100 Mohms min @ 500 VDC
Dielectric withstanding voltage: 2000 VAC for 1 minute
Temperature Rating:
Operating temperature: –65°C to +125°C
Environmental:
Lead free, RoHS compliant. RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	5/17/10
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: IEC CONNECTOR, ISOLATED FUSE
1.50mm SNAP IN, .187" [4.8] QC TERMINAL

SIZE	PART NO.	REV.
X	IEC-GS-1-150-RLS	-

REF: | SCALE: NTS | SHEET 1 OF 1