
APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	05/31/13	
A		REVISED SHAPE	06/17/13	
B		UPDATE DRAWING	9/7/20	LH/KC
C		UPDATE DIM	1/16/24	WX/YC

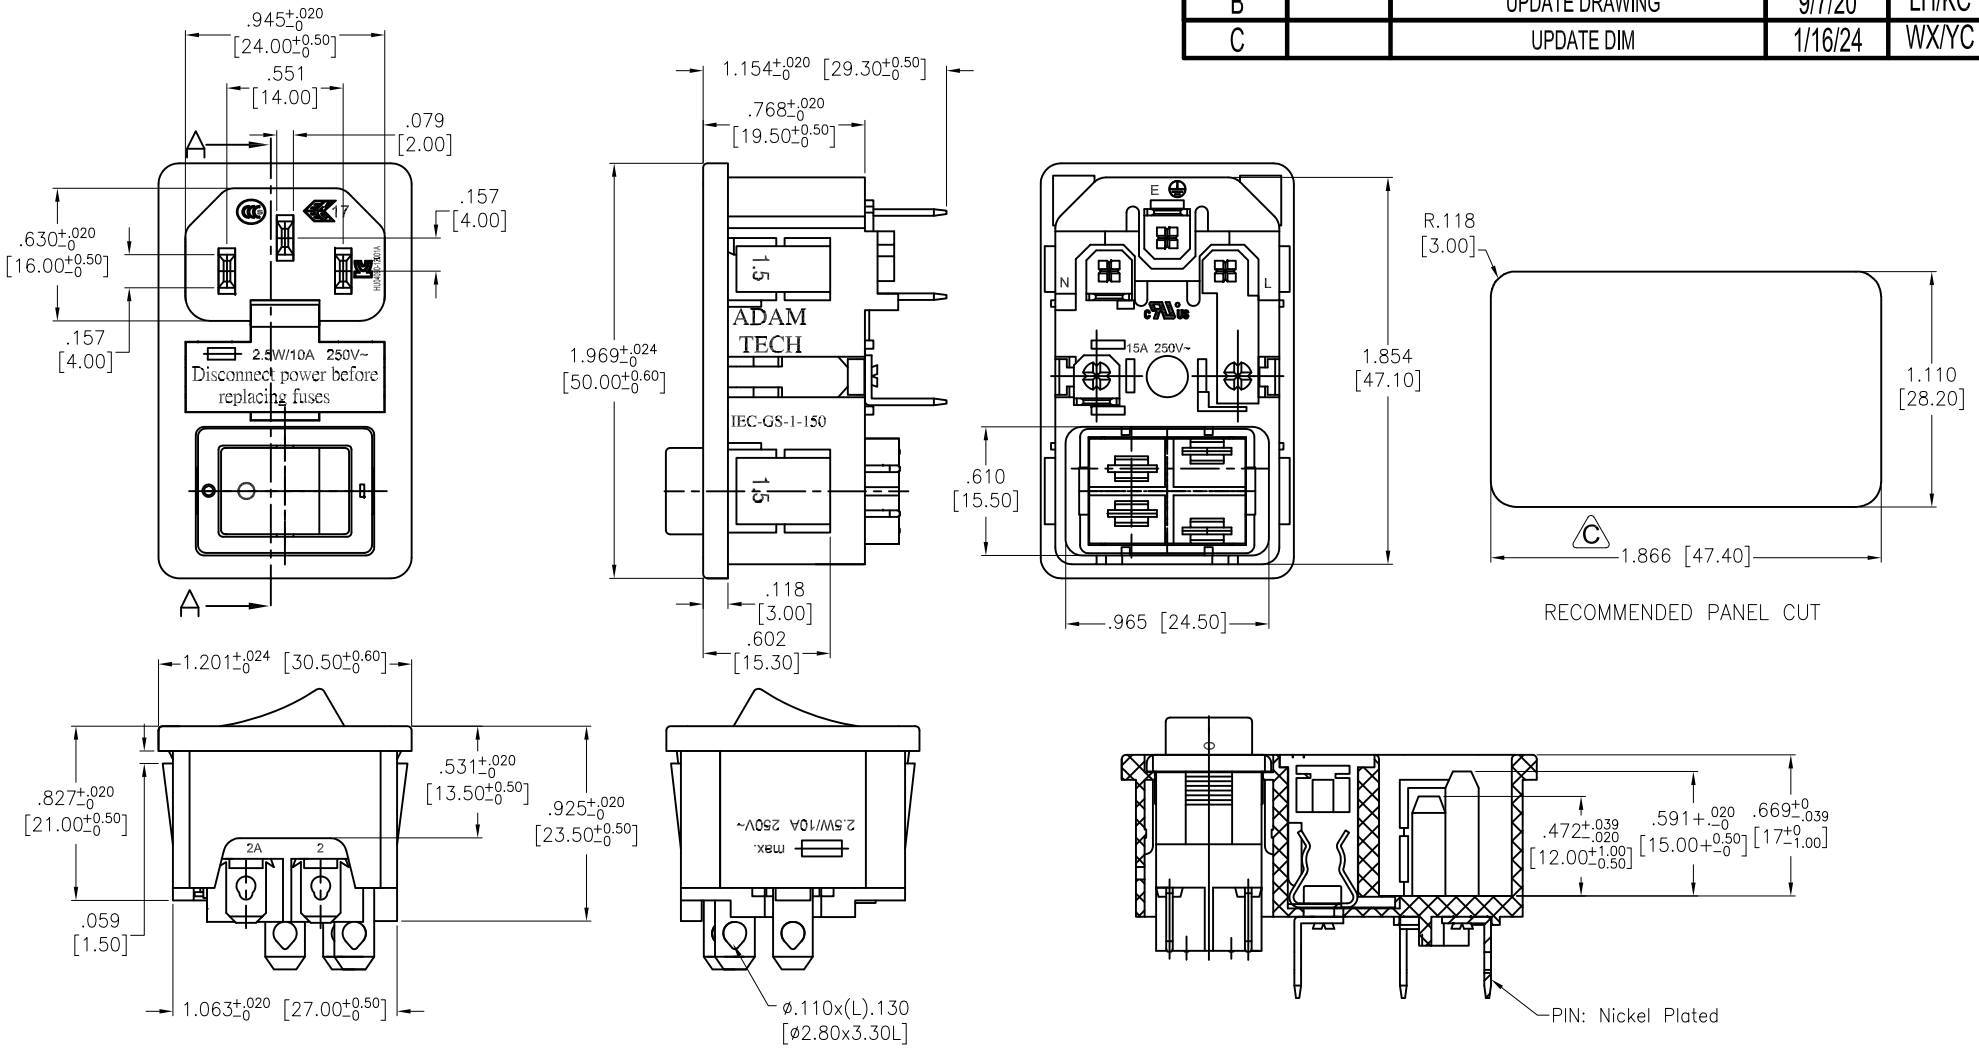

SPECIFICATIONS:
Material:
Insulator: Nylon66, rated UL 94V-0
Insulator color: Black
Contacts: Copper Alloy
Plating:
Tin over Copper underplate
Electrical:
Current rating: 15A / 250V (C-ULus)
10A / 250V (ENEC & CCC & KC)
Insulation resistance: 100 Mohms min @ 500 VDC
Dielectric withstanding voltage: 3000 VAC for 1 minute
Environmental:
Lead free, RoHS compliant. RoHS COMPLIANT

RECOMMENDED FUSE SIZE
5X20mm
2.5W, 10A Max., 250V
Fuse drawer accepts 1 Fuse only

Switch Pin Reverse

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	TW	05/31/13
CHECKED	NP	05/31/13
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: IEC CONNECTOR, ISOLATED FUSE, C18
1.50mm SNAP IN, .187" [4.8] QC TERMINAL

SIZE	PART NO.	REV.
X	IEC-GS-1-150-SPR	C

REF:	SCALE:	SHEET
S00087C	NTS	1 OF 1