


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/13/20	

APPROVED: _____


DATE: _____ TITLE: _____

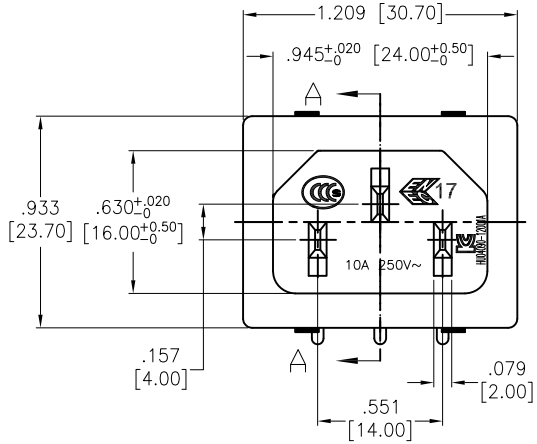


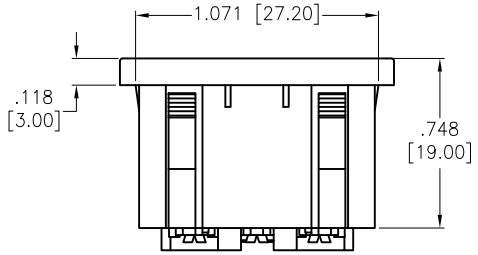

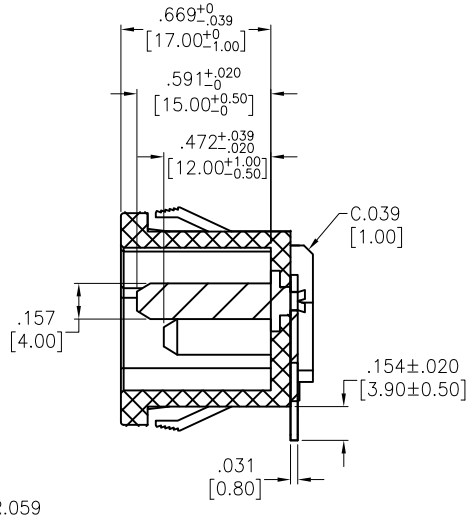


SECTION A–A

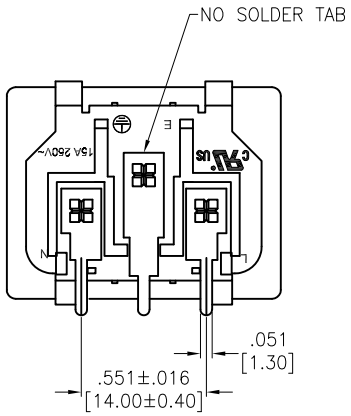

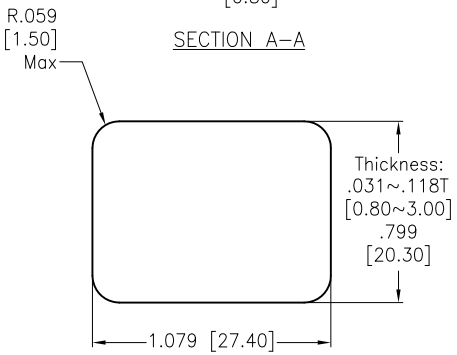

PANEL CUT OUT



RECOMMENDED PCB LAYOUT

SPECIFICATIONS:
Material:
Body: Nylon 66, rated UL 94V–0
Plating:
Nickel over Copper underplate overall on contact area
PCB pins: Tin over Copper underplate
Electrical:
Rating: 15A 250V (C–Ulus)
10A 250V (ENEC & CCC & KC)
Insulation resistance: 100 Mohms min @ 500 VDC
Dielectric withstanding voltage: 3000 VAC for 1 minute
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	10/13/20
CHECKED	KC	10/13/20
APPROVED		

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: IEC MALE INLET, SNAP-IN PANEL MOUNT RIGHT ANGLE, PCB TAILS, NO SOLDER TAB

SIZE	PART NO.	REV.
X	IEC-J-4-3.90-NST	-

REF: S00087C | SCALE: NTS | SHEET 1 OF 1