


APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/22/14	
A		UPDATE DRAWING	2/21/24	JJ/TW

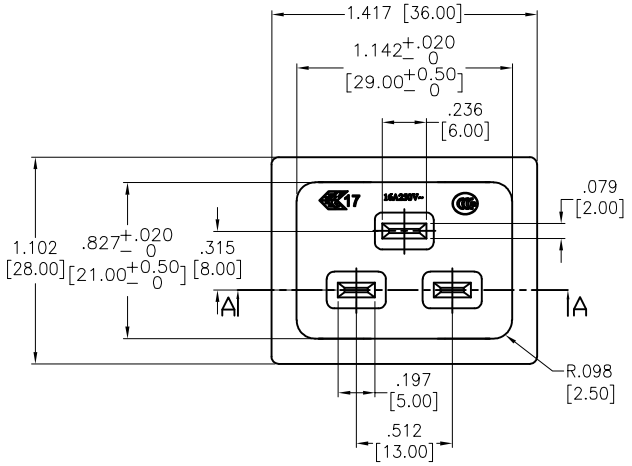

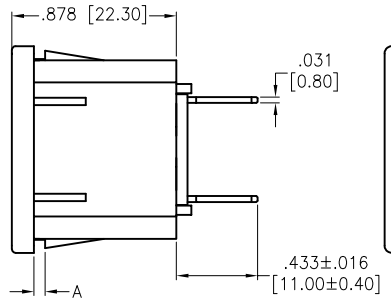


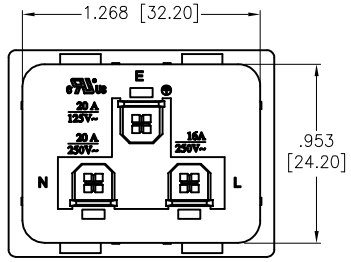

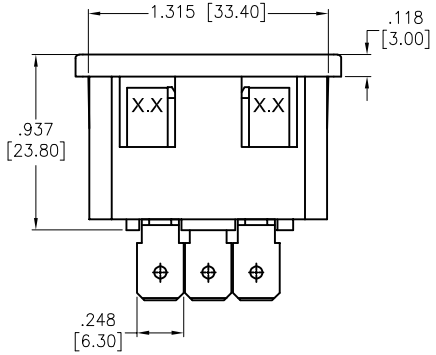

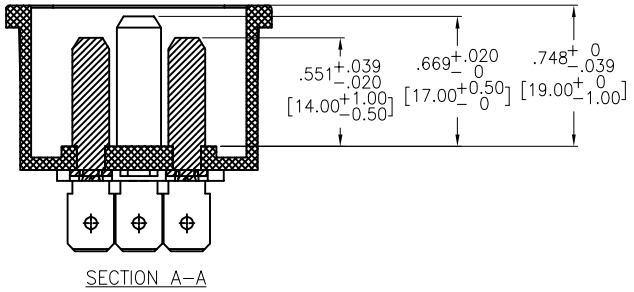

SECTION A–A

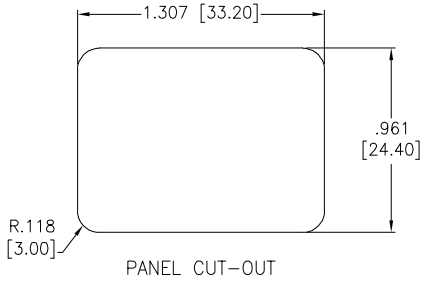

PANEL CUT–OUT

PART NUMBER	DIMENSION	PANEL THINKNESS
	A	X.X
IEC-N-2-SN-080	.031 [0.80]	0.8
IEC-N-2-SN-100	.039 [1.00]	1.0
IEC-N-2-SN-150	.059 [1.50]	1.5
IEC-N-2-SN-250	.098 [2.50]	2.5

SPECIFICATIONS:

Material:

Insulator: Nylon66, rated UL 94V–0

Insulator color: Black

Contact: Copper Alloy, Tin Plated

Pin: Copper Alloy, Nickel Plated

Electrical:

Rating: 20A 125V/ 20A 250V~(C–ULus)
16A 250V ENEC & CCC

Insulation resistance: 100 Mohms min @ 500 VDC

Dielectric withstanding voltage: 3000 VAC for 1 minute

Temperature Rating:

Operating temperature: –20°C to +70°C

Environmental:

Lead free, RoHS compliant. RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	ØX	±.10
.XX	± .020	ØXX	±.015
.XXX	± .015	ØXXX	±.010

DRAWN	AY	8/22/14
CHECKED	KW	8/22/14
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: IEC MALE, 20 AMP, PANEL MOUNT
.250 QC, PANEL MOUNT 0.8, 1.0, 1.5, 2.5mm

SIZE	PART NO.	REV.
X	IEC-N-2-SN-XXX	A

REF: S00087C | SCALE: NTS | SHEET 1 OF 1