
APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/02/06	
A		REDRAWN	10/29/20	LH/DH

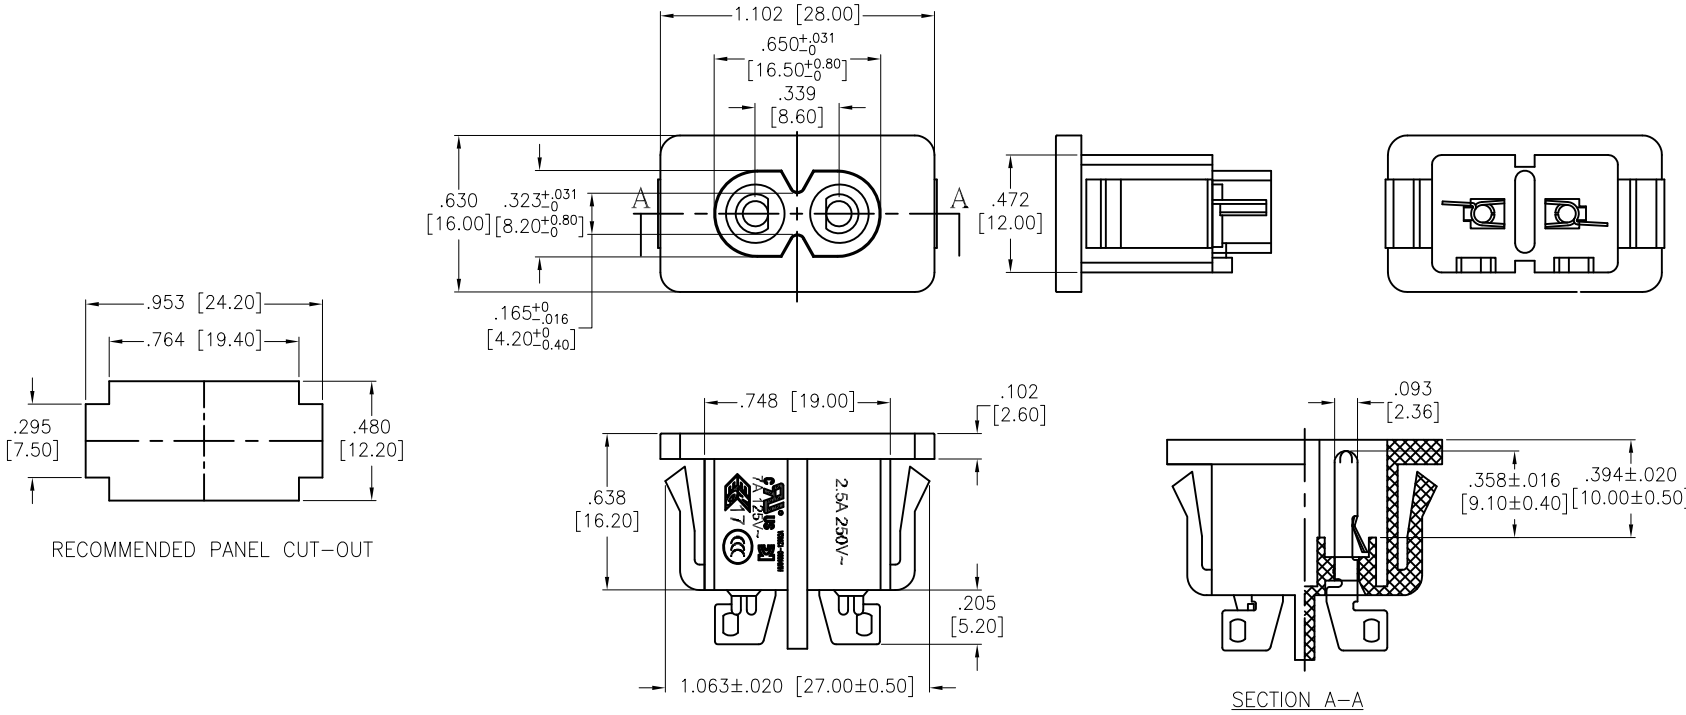

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V–0

Insulator color: Black

Terminal: Copper Alloy, Tin Plated

Pin: Copper Alloy, Nickel Plated

Electrical:

Current rating: 2.5 A 250 V~(C–ULus, ENEC & CCC & KC)
7 A 125V~(C–ULus)

Insulation resistance: 100 Mohms min @ 500 VDC

Dielectric withstanding voltage: 3,000 VAC for 1 minute

Environmental:

Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	BW	11/02/06
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: IEC 60320, C8, RIGHT ANGLE, SOLDER LUG, SNAP-IN

SIZE	PART NO.	REV.
X	IEC-NA-5	A

REF:	SCALE:	SHEET
S00087C	NTS	1 OF 1