


APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/3/07	
A		REVISED DIM.	8/26/09	
B		REVISED DIM.	7/19/12	
C		REDRAWN	12/25/12	

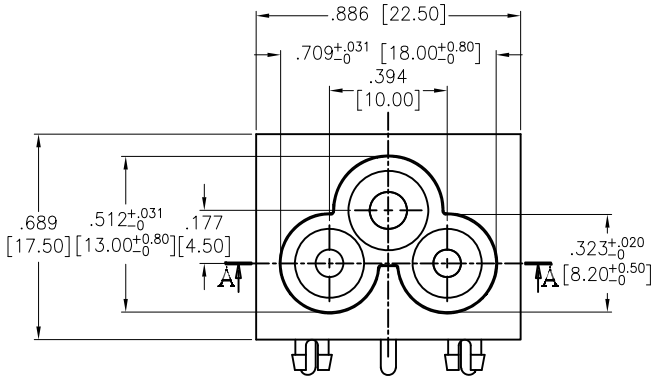


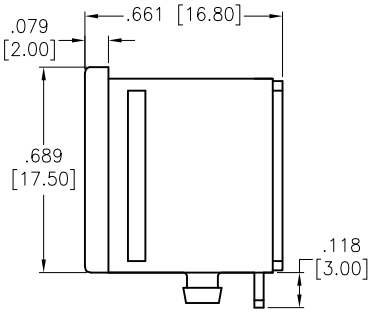


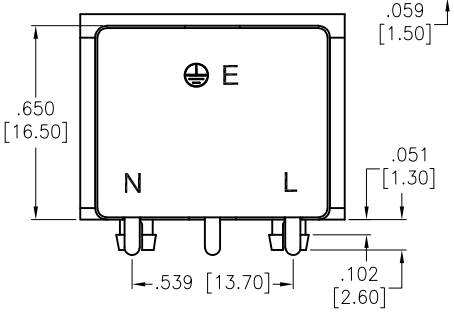

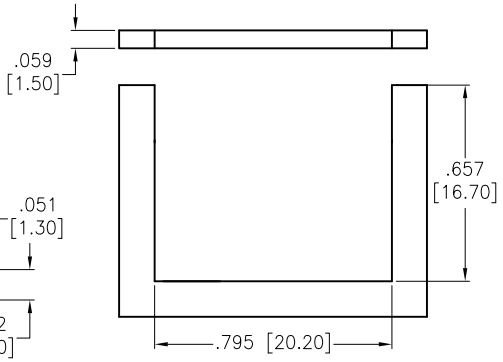



RECOMMENDED PANEL CUT

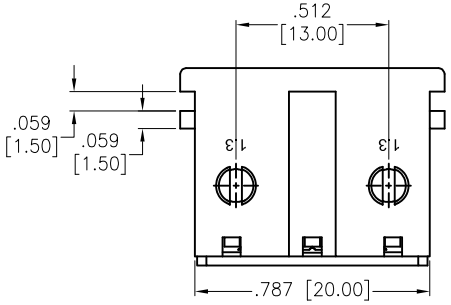

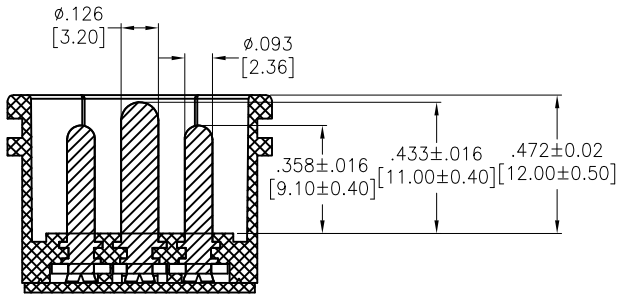

SECTION A–A



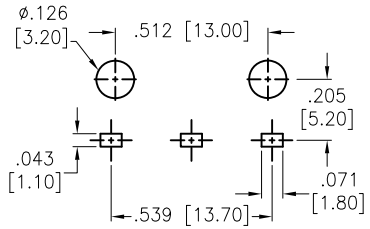

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V–0
Insulator color: Black
Soldering: Brass, Tin Plated
Contact: Brass, Nickel Plated
Electrical:
Rating: 2.5A @ 250V (C–ULus & ENEC & CCC)
Insulation resistance: 100 Mohms min @ 500 VDC
Dielectric withstanding voltage: 3000 VAC for 1 minute
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SHIREN	12/3/07
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: IEC 60320, C6, RIGHT ANGLE, PCB TERMINAL, PANEL MOUNT

SIZE	PART NO.	REV.
X	IEC-NH-4	C

REF: S00087C | SCALE: NTS | SHEET 1 OF 1