


APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/10/08	
A		REDRAWN	6/23/15	AY/KW

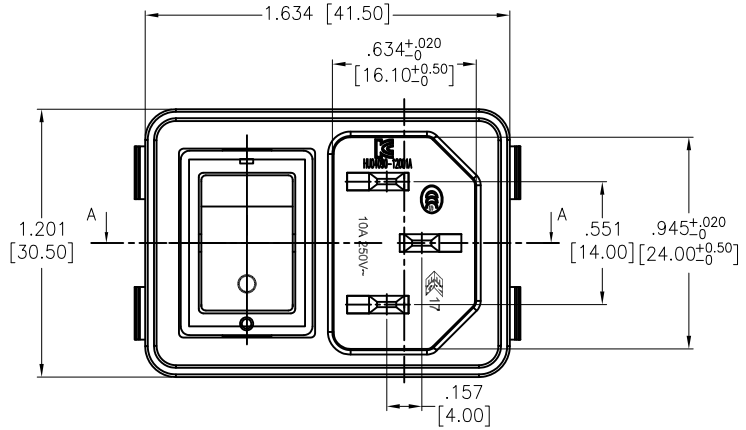


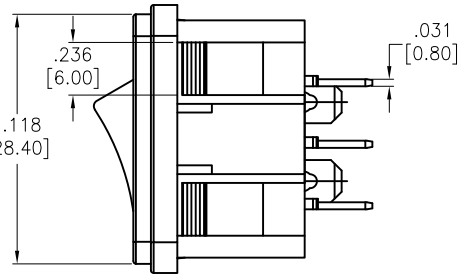





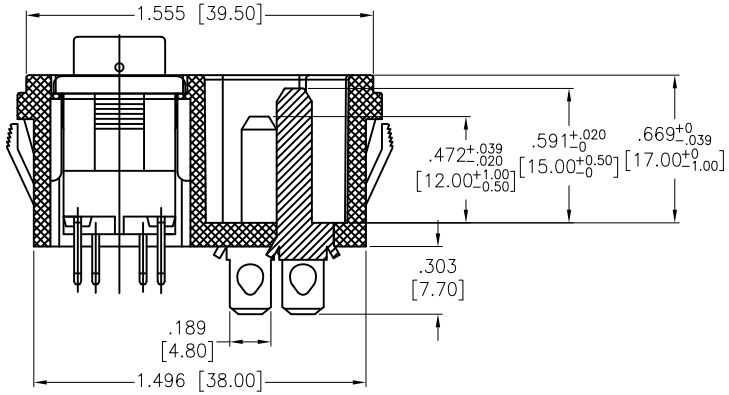

SECTION A–A

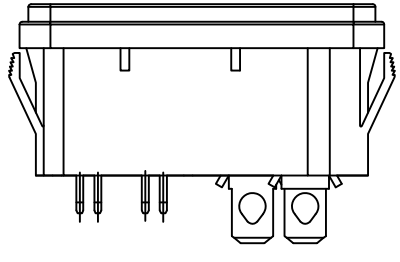

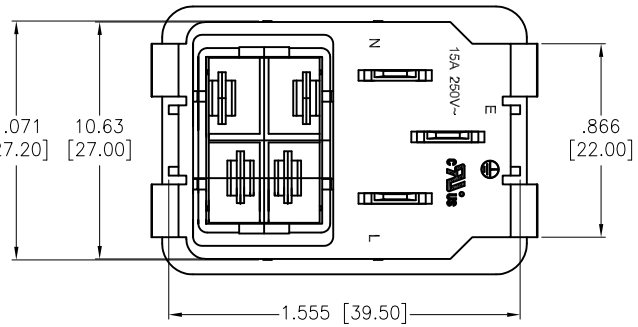

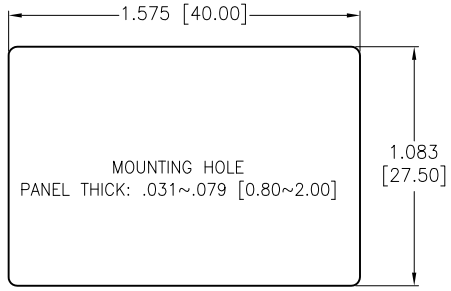

RECOMMENDED PANEL CUT–OUT

SPECIFICATIONS:
Material:
Insulator: Nylon66, rated UL 94V–0
Insulator color: Black
Contacts: Copper Alloy
Switch: RS01
Plating:
Tin over Copper underplate
Electrical:
Operating voltage: 250V
Current rating: 15A (C–ULus)
10A (ENEC & CCC & KC)
Insulation resistance: 100 Mohms min @ 500 VDC
Dielectric withstanding voltage: 3,000 VAC for 1 minute
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	3/10/08
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
IEC CONNECTOR WITH SWITCH
SNAP IN, .187" [4.80] QC TERMINAL

SIZE	PART NO.	REV.
X	IEC-Q-1	A

REF: S00087C | SCALE: NTS | SHEET 1 OF 1