


APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/10/09	
A		REDRAWN	12/24/12	
B		UPDATE DIM.	4/18/18	AY/RC1

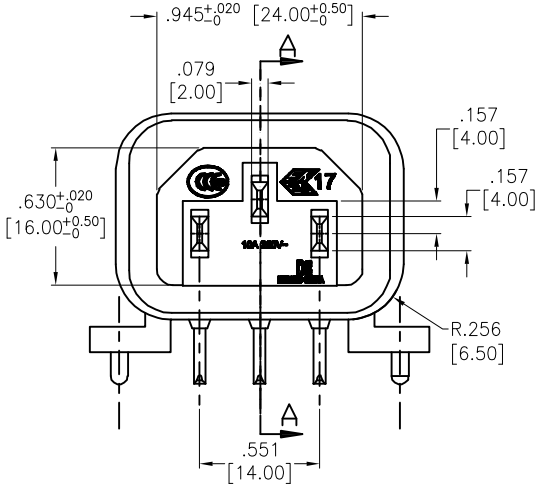


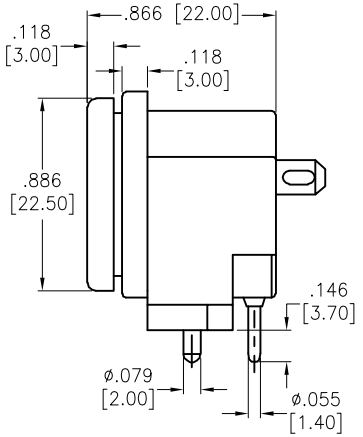


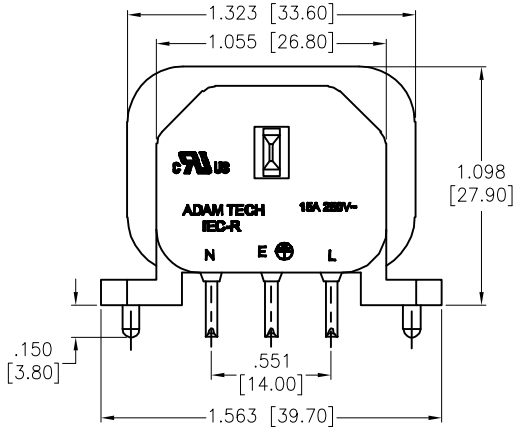

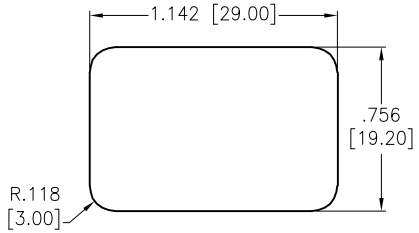


RECOMMENDED PANEL CUT

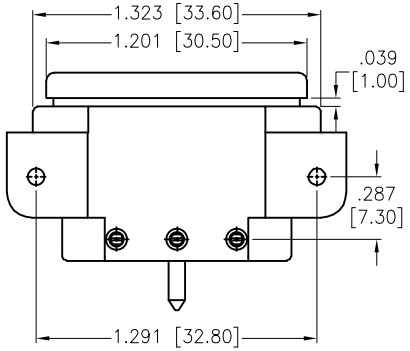

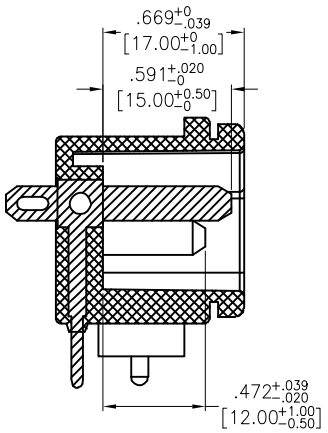

SECTION A–A

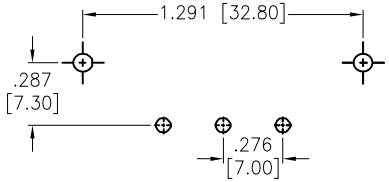

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:
Material:
Insulator: Nylon 66, glass reinforced, rated UL 94V–0
Insulator color: Black
Contacts: Brass
Plating:
Tin over Copper underplate overall
Electrical:
Operating voltage: 250 VAC
Current rating: 15A @ 250V (C–ULus)
10A @250V (ENEC & CCC & KC)
Insulation resistance: 100 Mohms min @ 500 VDC
Dielectric withstanding voltage: 3,000 VAC for 1 minute
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	6/10/09
CHECKED		
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: IEC MALE INLET, RIGHT ANGLE PCB TAILS, LOCATING PINS

SIZE	PART NO.	REV.
X	IEC-R-4	B

REF: S00087C | SCALE: NTS | SHEET 1 OF 1