




APPROVED: _____
 DATE: _____ TITLE: _____



Rev	AWO #	Description	Date	Appr
-		RELEASED	5/6/21	

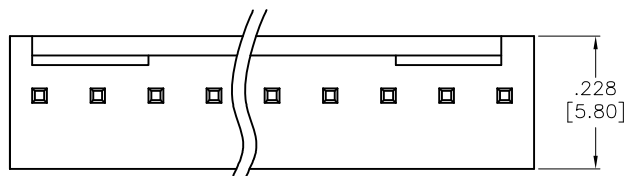


2~4P

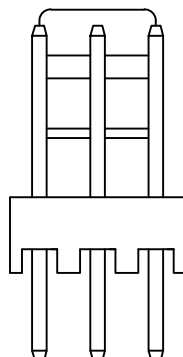

5~20P

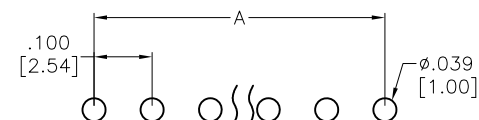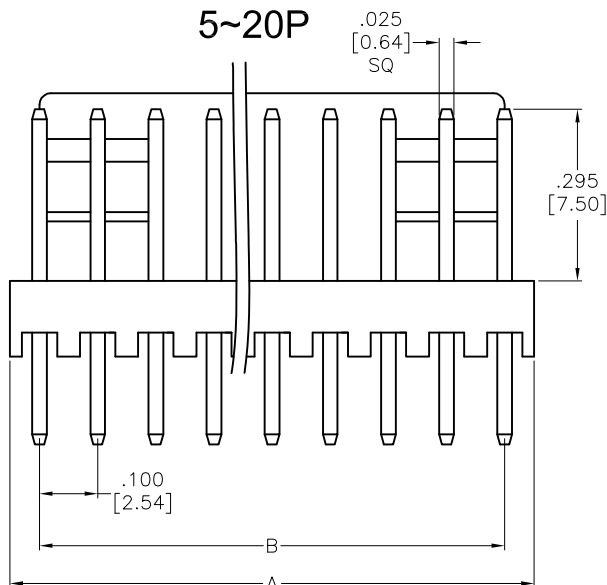

RECOMMENDED P.C.B LAYOUT

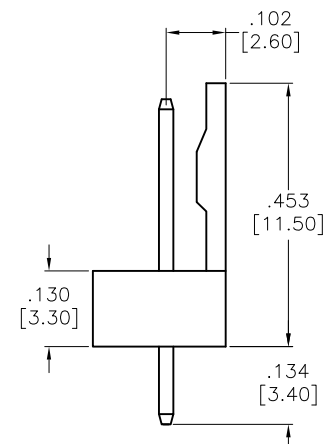

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-2

Insulator color: Beige

Contacts: Brass, Gold flash plated

Plating:

15u" Gold over Nickel underplate overall

Electrical:

Voltage rating: 250 VAC

Current rating: 2.5 Amp

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1000 VAC for 1 Minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant



Positions: 2 thru 20

A = .100 [2.54] x No. of Positions

B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
 ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010

DRAWN	JJ	5/6/21
CHECKED	TW	5/6/21
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
 AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
 PERMISSION FROM ADAM TECH

**ADAM
 TECH**

909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE
 .100 [2.54] LOCKING HEADER
 STRAIGHT, PCB, 15u" GOLD

SIZE X	PART NO. LHA-XX-GS-BG-15	REV. -
REF: S00015T	SCALE: NTS	SHEET 1 OF 1