

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/27/18	


APPROVED: _____


DATE: _____ TITLE: _____

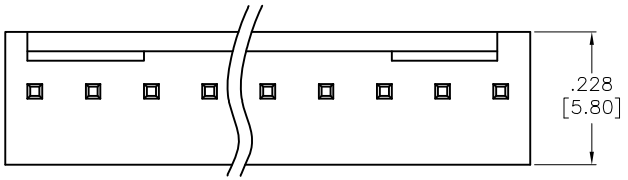

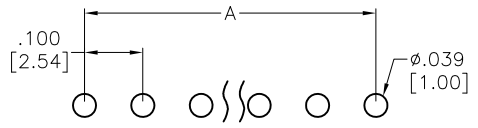

RECOMMENDED P.C.B LAYOUT

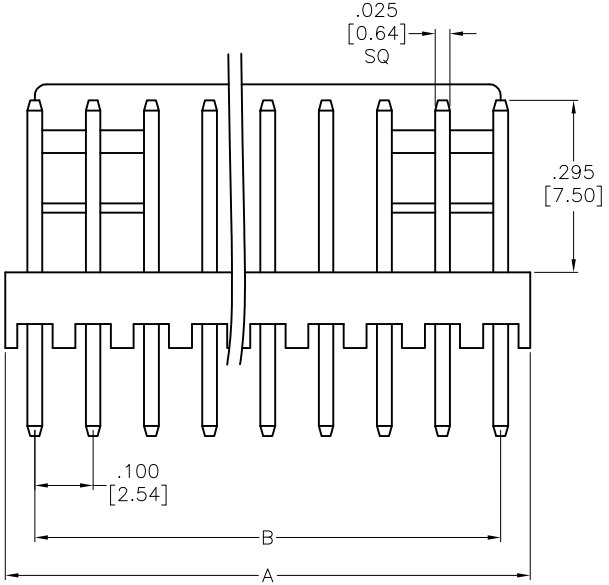

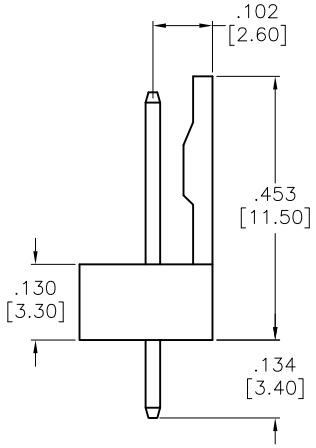

Positions: 2 thru 20
A = .100 [2.54] x No. of Positions
B = .100 [2.54] x No. of Spaces

SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V-2
Insulator color: Beige
Contacts: Brass, Gold flash plated
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	7/27/18
CHECKED	KC	7/27/18
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .100 [2.54] LOCKING HEADER
STRAIGHT, PCB, GOLD PLATED

SIZE	PART NO.	REV.
X	LHA-XX-GS-BG	-

REF:	SCALE:	SHEET
S00015T	NTS	1 OF 1