
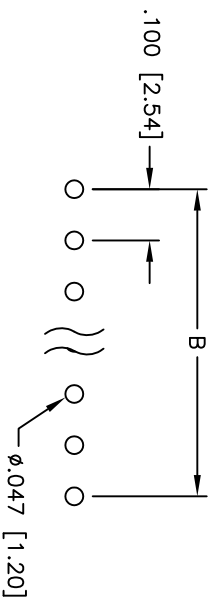




Rev	AWO #	Description	Date	Appr
-		RELEASED	4/8/05	

APPROVED: _____

DATE: _____ TITLE: _____

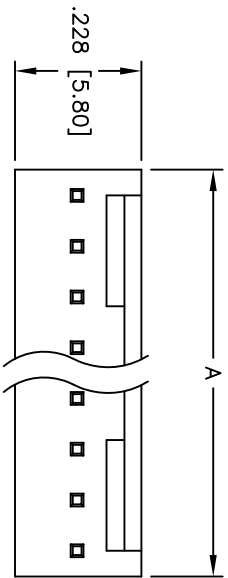

PCB LAYOUT

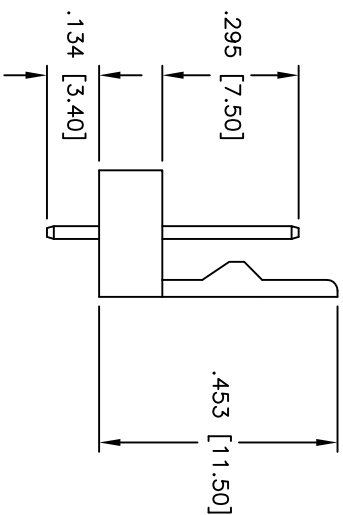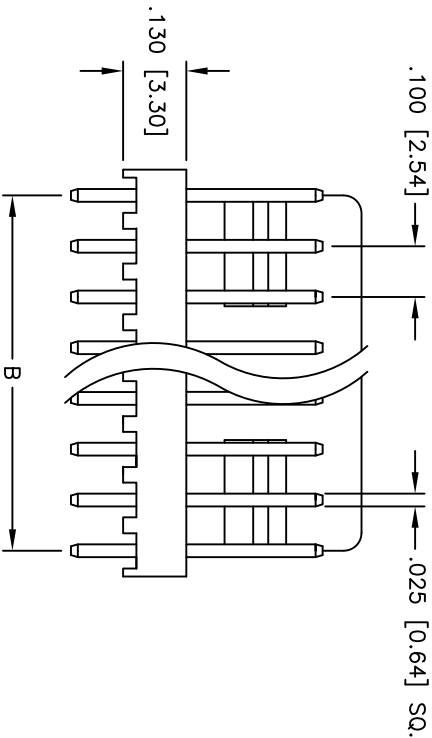

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-2

Insulator color: White

Contacts: Brass

Plating:

Gold Flash over Nickel underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 3 Amps max

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1,500 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant



Positions: 2 thru 20
A = .100 [2.54] x No. of Positions
B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		TITLE .100 [2.54] LOCKING HEADER STRAIGHT, PCB, GOLD PLATED	
INCHES	HOLES	909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
.X ± .10	ØX ± .10	ADAM TECH	
.XX ± .020	ØXX ± .015		
.XXX ± .015	ØXXX ± .010		
APPROVALS	DATE	PART NO. LHA-XX-GS	
DRAWN	SS	SIZE	
CHECKED		X	
APPROVED		REF:	
		SCALE: NTS	
		SHEET 1 OF 1	