

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/1/16	
A		UPDATED COLOR	1/23/17	HR/YC

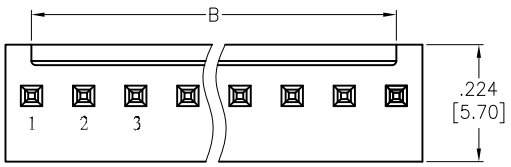


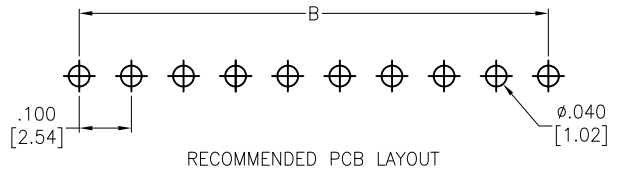

RECOMMENDED PCB LAYOUT

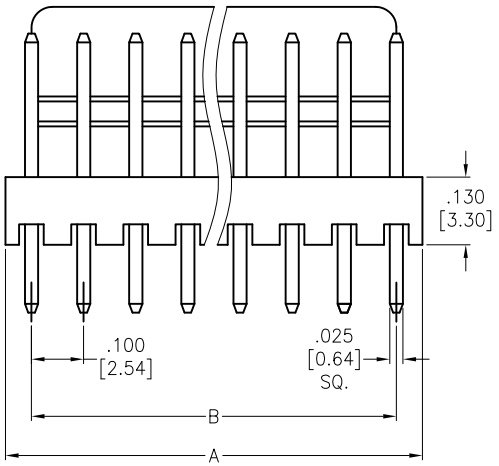

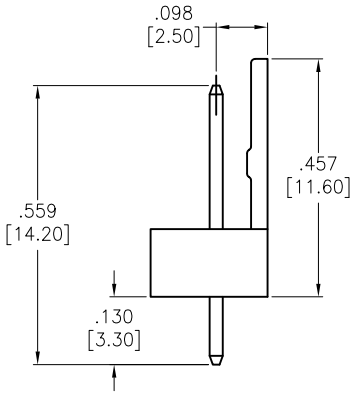

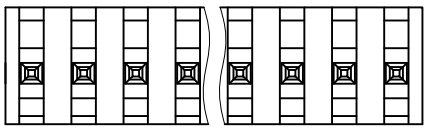

SPECIFICATIONS:

Material:

Insulator: Nylon 46, rated UL 94V-0

Insulator color: Beige

Contacts: Brass

Plating:

Tin over Copper underplate overall

Electrical:

Current rating: 3.0 Amps

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 02 thru 20

A= .100 [2.54] x No. of Positions

B= .100 [2.54] x No. of Space

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	3/1/16
CHECKED	CT	3/1/16
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE

.100 [2.54] LOCKING HEADER, STRAIGHT, PCB

SIZE	PART NO.	REV.
X	LHA-XX-TS-NY46-V0	A

REF:	SCALE:	SHEET
S00019C	NTS	1 OF 1