

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/23/17	


APPROVED: _____


DATE: _____ TITLE: _____

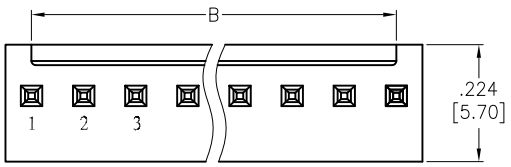


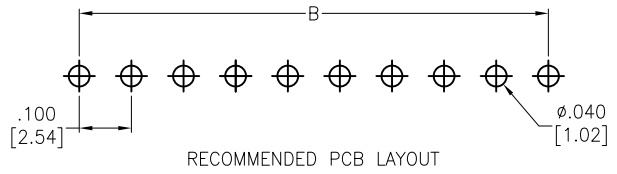

RECOMMENDED PCB LAYOUT

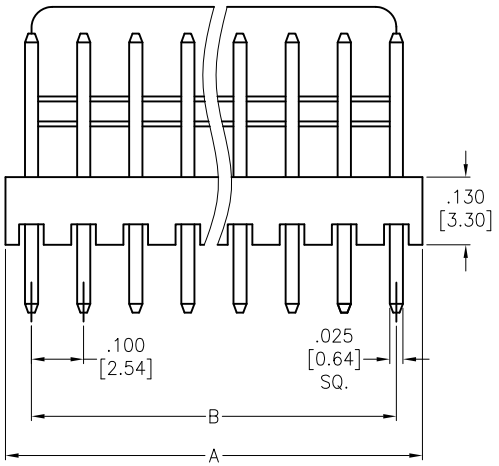

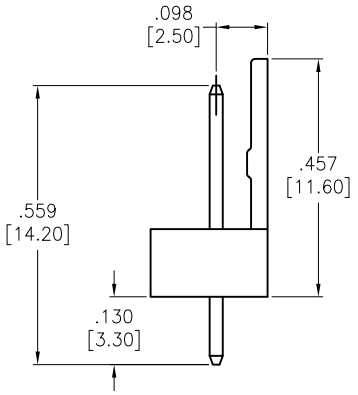

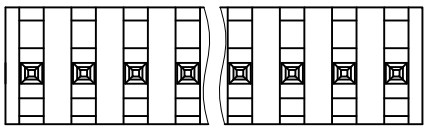

SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V-0
Insulator color: Beigr
Contacts: Brass
Plating:
Tin over Copper underplate overall
Electrical:
Current rating: 3.0 Amp
Contact resistance: 20 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 02 thru 20
A= .100 [2.54] x No. of Positions
B= .100 [2.54] x No. of Space

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	1/23/17
CHECKED	YC	1/23/17
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.100 [2.54] LOCKING HEADER, STRAIGHT, PCB

SIZE	PART NO.	REV.
X	LHA-XX-TS-NY66-V0	-

REF:	SCALE:	SHEET
S00019C	NTS	1 OF 1