

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/15/18	


APPROVED: _____


DATE: _____ TITLE: _____

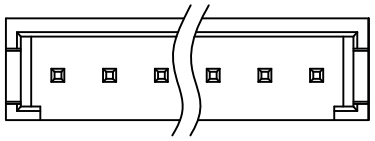

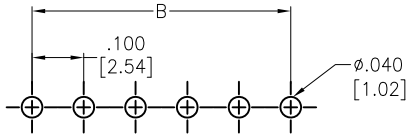

RECOMMENDED PCB LAYOUT

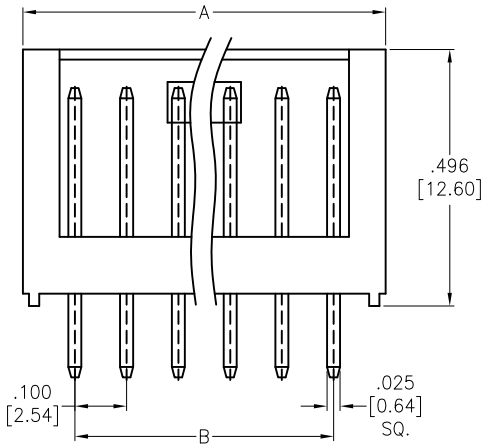

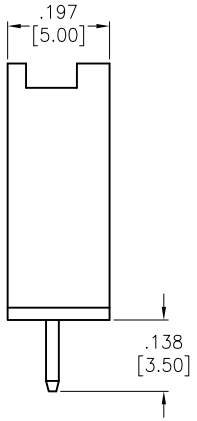

SPECIFICATIONS:
Material:
Insulator: Nylon66, rated UL 94V-2
Insulator color: Black
Contacts: Brass
Plating:
Tin over Copper underplate overall
Electrical:
Voltage rating: 250V AC/DC
Current rating: 3A AC/DC
Contact resistance: 20 mohms max
Insulation resistance: 1,000 Mohms min
Withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
-25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 2 thru 22
A = .100 [2.54] x No. of Spaces + .203 [5.16]
B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	5/15/18
CHECKED	YC	5/15/18
APPROVED		

ADAM TECH
INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.100 [2.54] LOCKING HEADER, STRAIGHT, PCB

SIZE	PART NO.	REV.
X	LHAB-A-XX-TS	-

REF:	SCALE:	SHEET
S00111C	NTS	1 OF 1