


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/22/19	


APPROVED: _____

DATE: _____ TITLE: _____

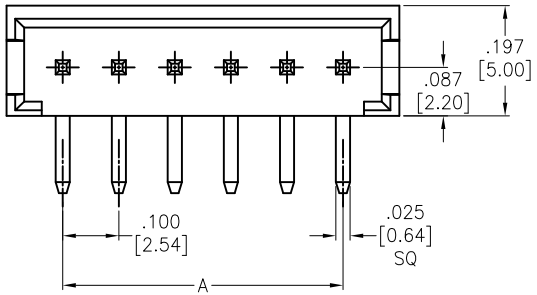


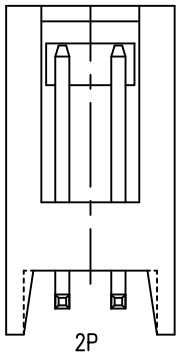

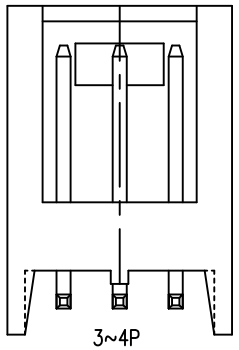

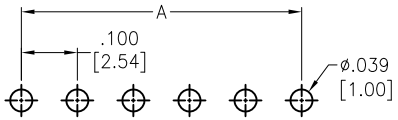

RECOMMENDED PCB LAYOUT

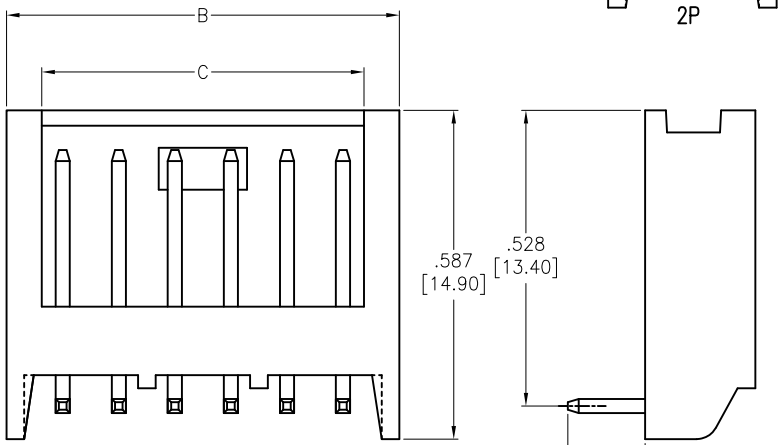

5P–22P

Positions: 2 thru 22
A = .100 [2.54] x No. of Spaces
B = .100 [2.54] x No. of Spaces + .200 [5.08]
C = .100 [2.54] x No. of Spaces + .075 [1.90]

SPECIFICATIONS:
Material:
Insulator: Hi–Temp Thermoplastic, rated UL 94V–0
Insulator color: Black
Contacts: Brass
Plating:
Tin over Nickel underplate overall
Electrical:
Current rating: 3.0A
Contact resistance: 20 mohms max
Insulation resistance: 1000 Mohms min
Dielectric withstanding voltage: 1000 VAC/DC for 1 minute
Temperature Rating:
Operating temperature: –25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	4/22/19
CHECKED	YC	4/22/19
APPROVED		

ADAM TECH
INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.100 [2.54] LOCKING HEADER, RIGHT ANGLE, PCB

SIZE	PART NO.	REV.
X	LHAB-B-XX-TR-HT-V0	-

REF:	SCALE:	SHEET
S00019C	NTS	1 OF 1