

| Rev | AWO # | Description | Date | Appr |
|---|---|---|---|---|
| - | | RELEASED | 4/22/19 | |


APPROVED: _____

DATE: _____ TITLE: _____

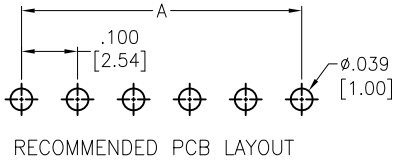



RECOMMENDED PCB LAYOUT

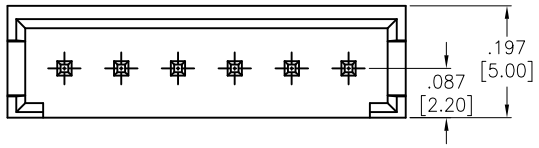

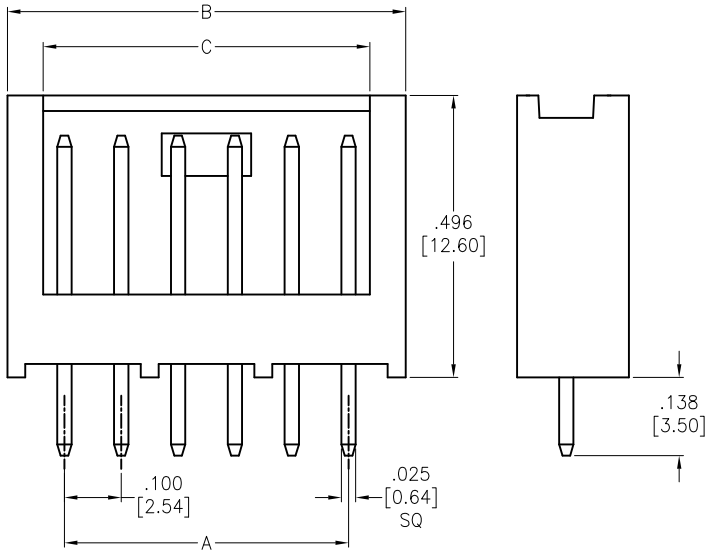
5P–22P

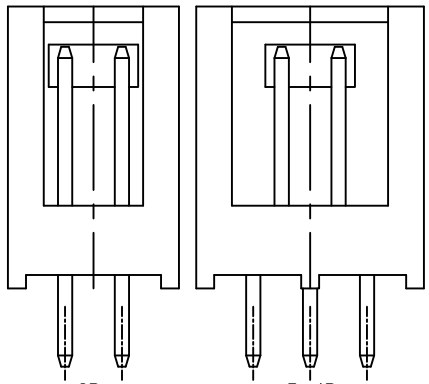


Positions: 2 thru 22
A = .100 [2.54] x No. of Spaces
B = .100 [2.54] x No. of Spaces + .200 [5.08]
C = .100 [2.54] x No. of Spaces + .075 [1.90]

SPECIFICATIONS:
Material:
Insulator: Hi–Temp Thermoplastic, rated UL 94V–0
Insulator color: Black
Contacts: Brass
Plating:
Tin over Nickel underplate overall
Electrical:
Current rating: 3.0A
Contact resistance: 20 mohms max
Insulation resistance: 1000 Mohms min
Dielectric withstanding voltage: 1000 VAC/DC for 1 minute
Temperature Rating:
Operating temperature: –25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

| INCHES | | HOLES | |
|---|---|---|---|
| .X | ± .10 | Ø.X | ±.10 |
| .XX | ± .020 | Ø.XX | ±.015 |
| .XXX | ± .015 | Ø.XXX | ±.010 |

| APPROVALS | | DATE |
|---|---|---|
| DRAWN | AY | 4/22/19 |
| CHECKED | YC | 4/22/19 |
| APPROVED | | |


ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710


TITLE
.100 [2.54] LOCKING HEADER, STRAIGHT, PCB

| SIZE | PART NO. | REV. |
|---|---|---|
| X | LHAB-B-XX-TS-HT-V0 | - |

| REF: | SCALE: | SHEET |
|---|---|---|
| S00019C | NTS | 1 OF 1 |