


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/22/19	

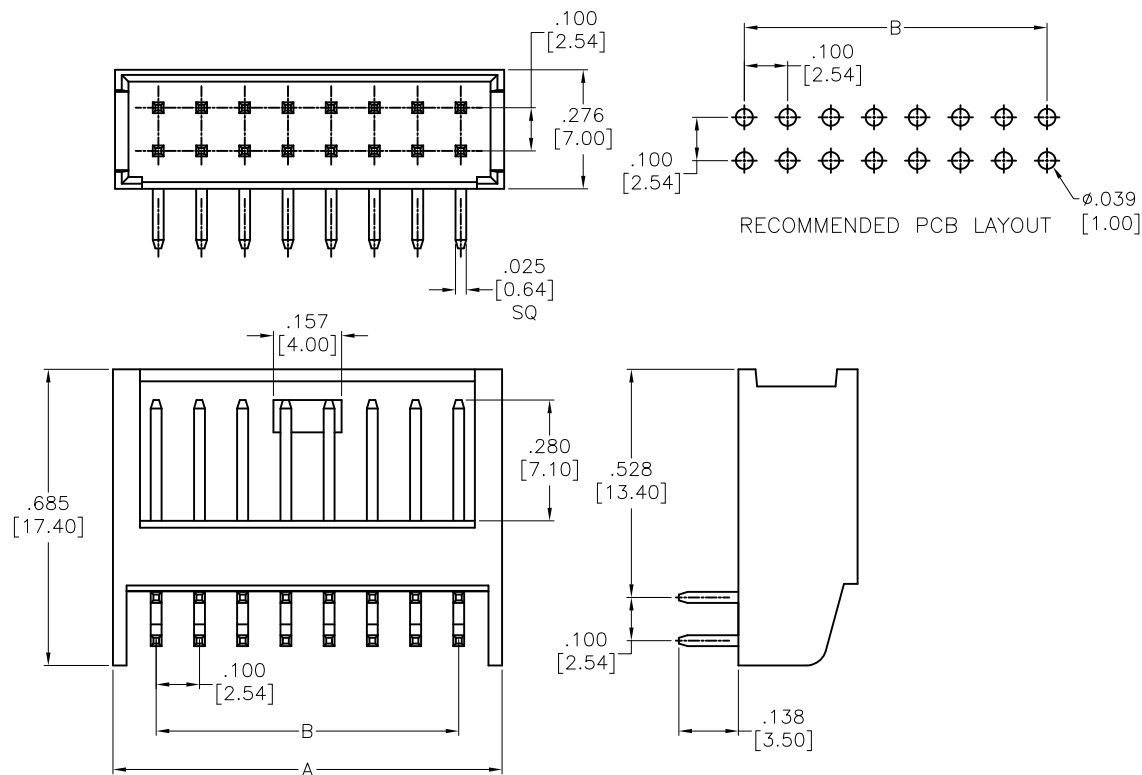

SPECIFICATIONS:

Material:
 Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating:
 Tin over Nickel underplate overall
 Electrical:
 Current rating: 3.0A
 Contact resistance: 20 mohms max
 Insulation resistance: 1000 Mohms min
 Dielectric withstanding voltage: 1000 VAC/DC for 1 minute
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant



Positions: 8, 12, 16, 18, 24, 30, 36, 44
 A = .100 [2.54] x No. of Spaces +.200 [5.08]
 B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 ØX ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010			ADAM TECH INTERCONNECTS		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS		DATE				
DRAWN	AY	4/22/19		TITLE .100 [2.54] LOCKING HEADER, DUAL ROW RIGHT ANGLE, PCB		
CHECKED	YC	4/22/19				
APPROVED						
SIZE X		PART NO. LHAB-D-XX-TR-HT-V0			REV. -	
REF: S00019C		SCALE: NTS		SHEET 1 OF 1		