

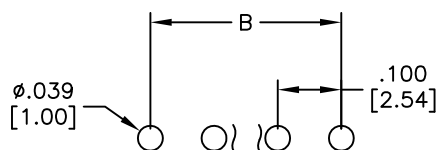



APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/21/12	
A		ADDED DIM.	6/15/16	AY/AL

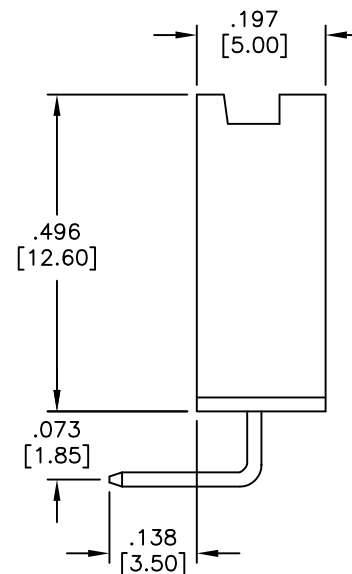

RECOMMENDED PCB LAYOUT

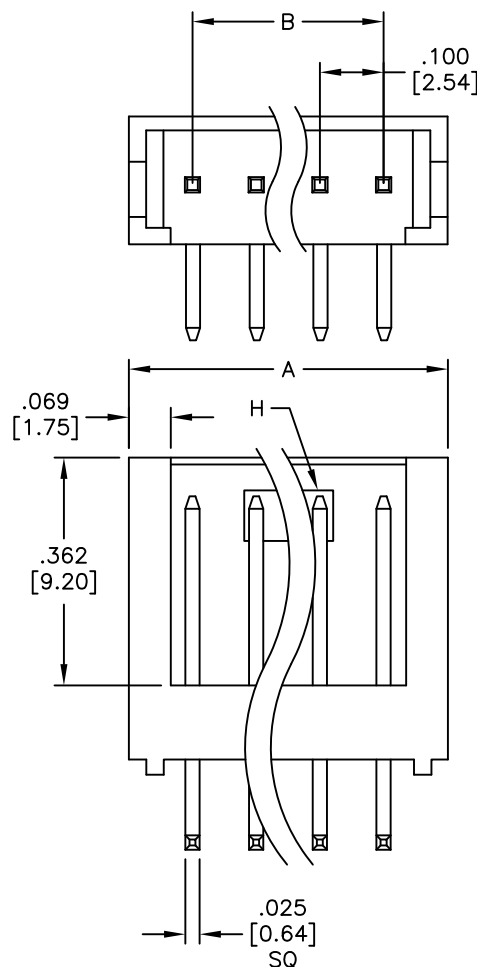

SPECIFICATIONS:

Material:
 Insulator: PBT, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating:
 Tin over Copper underplate overall
 Electrical:
 Operating voltage: 250V AC,DC
 Current rating: 3A AC,DC
 Contact resistance: 20 mohms max
 Withstanding voltage: 1,000 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant



Positions: 2 thru 12

A = .100 [2.54] x No. of Spaces +.200 [5.08]

B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLES
 .X ± .10 Ø.X ± .10
 .XX ± .020 Ø.XX ± .015
 .XXX ± .015 Ø.XXX ± .010

APPROVALS		DATE
DRAWN	AY	5/21/12
CHECKED	WC	5/21/12
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE
 .100 [2.54] LOCKING HEADER, RIGHT ANGLE, PCB

SIZE X	PART NO. LHAB-XX-TR-V0	REV. A
REF: S00123T	SCALE: NTS	SHEET 1 OF 1