APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/18/10	
A		REVISED COLOR	5/21/12	
B		ADDED DIM.	6/15/16	AY/AL

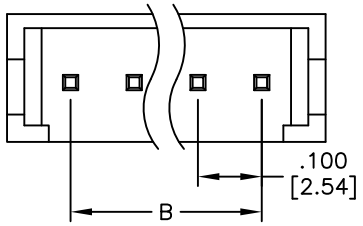



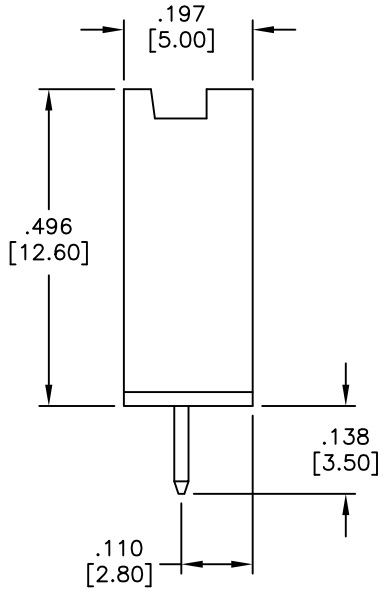

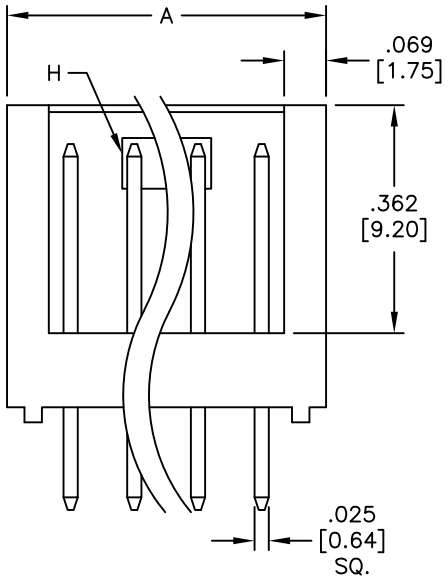

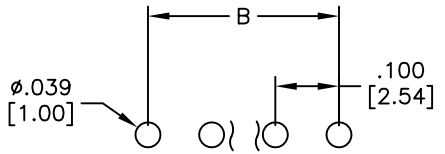

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:
Material:
Insulator: PBT, rated UL 94V–0
Insulator color: Black
Contacts: Brass
Plating:
Tin over Copper underplate overall
Electrical:
Operating voltage: 250V AC,DC
Current rating: 3A AC,DC
Contact resistance: 20 mohms max
Withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
Operating temperature: –25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 2 thru 12
A = .100 [2.54] x No. of Spaces +.200 [5.08]
B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	5/18/10
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.100 [2.54] LOCKING HEADER, STRAIGHT, PCB

SIZE	PART NO.	REV.
X	LHAB-XX-TS-V0	B

REF: S00123T	SCALE: NTS	SHEET 1 OF 1