

| Rev | AWO # | Description | Date | Appr |
|---|---|---|---|---|
| - | | RELEASED | 01/23/07 | |
| A | | REDRAWN | 12/11/09 | |
| B | | UPDATE SPEC. | 7/14/17 | AY/NC |


APPROVED: _____


DATE: _____ TITLE: _____

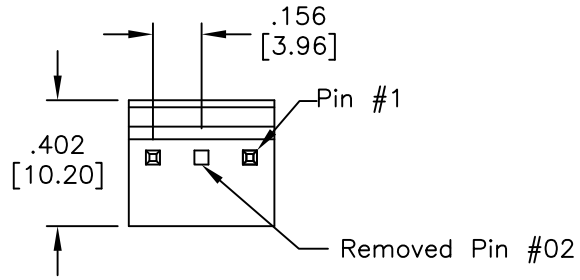


RECOMMENDED PCB LAYOUT



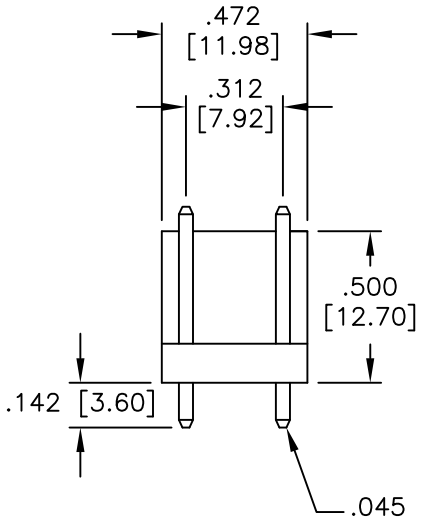
SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V-2
Insulator color: Natural
Contacts: Brass
Plating:
Tin over Copper underplate overall
Electrical:
Voltage rating: 250 V AC, DC
Current rating: 5 A AC, DC
Insulation resistance: 1000Mohms min.
Dielectric withstanding voltage: 1500 VAC for 1 minute
Temperature Rating:
Operating temperature: −25°C to +85°C
Environmental:
Lead free, RoHS compliant.

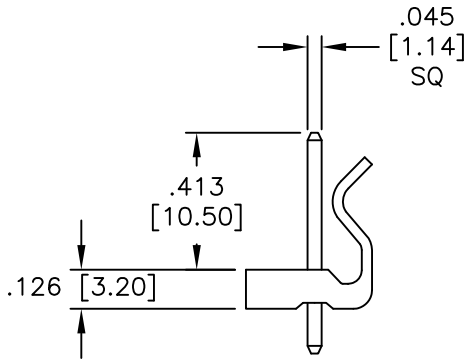RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

| INCHES | | HOLES | |
|---|---|---|---|
| .X | ± .10 | Ø.X | ±.10 |
| .XX | ± .020 | Ø.XX | ±.015 |
| .XXX | ± .015 | Ø.XXX | ±.010 |

| APPROVALS | | DATE |
|---|---|---|
| DRAWN | BW | 01/23/07 |
| CHECKED | | |
| APPROVED | | |


**ADAM TECH**
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710


TITLE: .156 [3.96] LOCKING HEADER, PCB, STRAIGHT
REMOVE PIN #02

| SIZE | PART NO. | REV. |
|---|---|---|
| X | LHB-03-SA1-X02 | B |

REF: S00016T | SCALE: NTS | SHEET 1 OF 1