


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/20/16	
A		UPDATE SPEC.	1/6/20	OW/IW

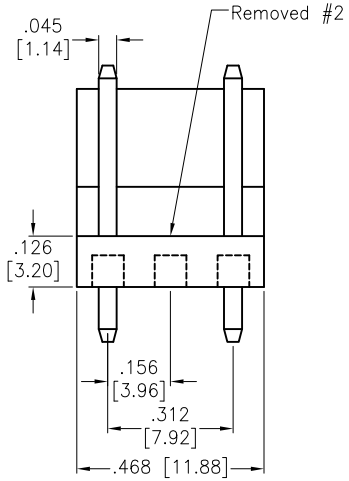

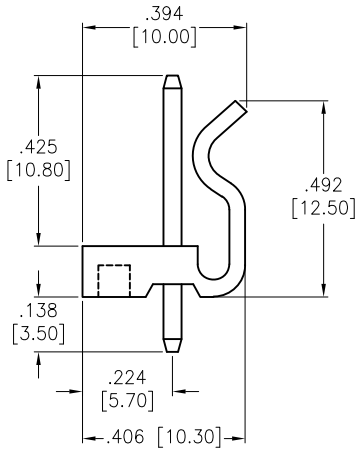



RECOMMENDED PCB LAYOUT

SPECIFICATIONS:
Material:
Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Natural
Contacts: Brass
Plating:
Tin over Copper underplate overall
Electrical:
Voltage rating: 250 V AC/DC
Current rating: 5 A AC/DC (A)
Contact resistance: 10 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,500 VAC for 1 minute
Temperature Rating:
Operating temperature: -25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	TW	10/20/16
CHECKED		
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .156 [3.96] POWER HEADER, STRAIGHT 3P, REMOVED #2, WITH LOCK POLARIZER

SIZE	PART NO.	REV.
X	LHB-03-SA1-X02-V0-HT	A

REF: S00015T | SCALE: NTS | SHEET 1 OF 1