

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/22/04	
A		Added RoHS to specifications	10/31/08	
B		UPDATE DRAWING	10/24/18	AY/TY

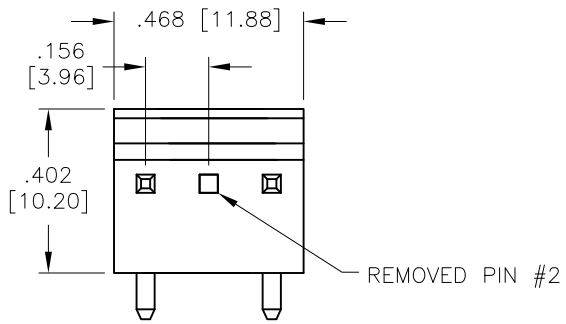



RECOMMENDED PCB LAYOUT

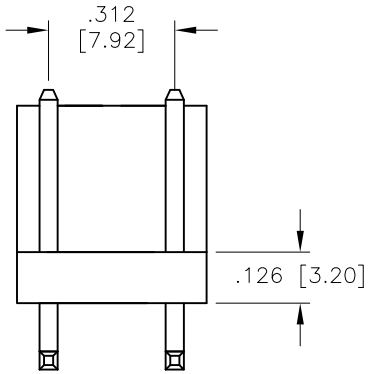

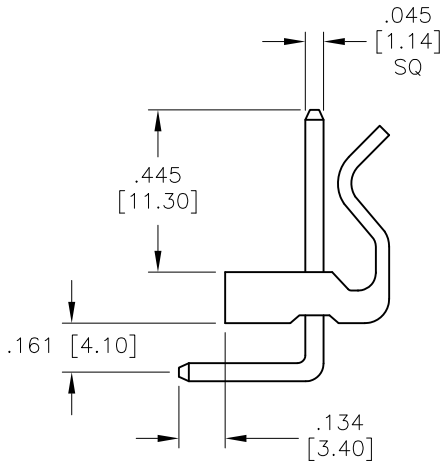

SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V-2
Insulator color: White
Contacts: Brass
Plating:
Tin over Copper underplate overall
Electrical:
Voltage rating: 250V AC/DC
Current rating: 5 A AC/DC
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,500 VAC for 1 minute
Temperature Rating:
-25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	11/22/04
CHECKED		
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .156 [3.96] POWER HEADER, RIGHT ANGLE WITH LOCK POLARIZER, PIN #2 REMOVED

SIZE	PART NO.	REV.
X	LHB-03-SB1-X02	B

REF: S00016T | SCALE: NTS | SHEET 1 OF 1