

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/30/17	
A		UPDATE DIM.	3/26/18	AY/MY
B		UPDATE DIM.	7/14/21	WX/TL

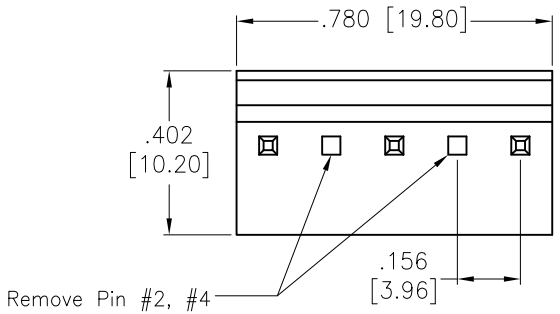

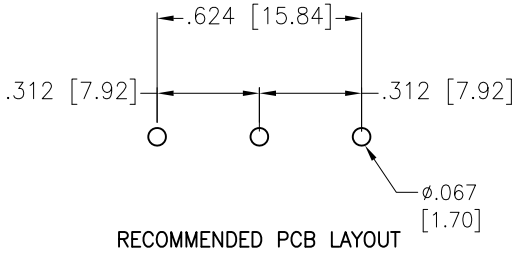

RECOMMENDED PCB LAYOUT

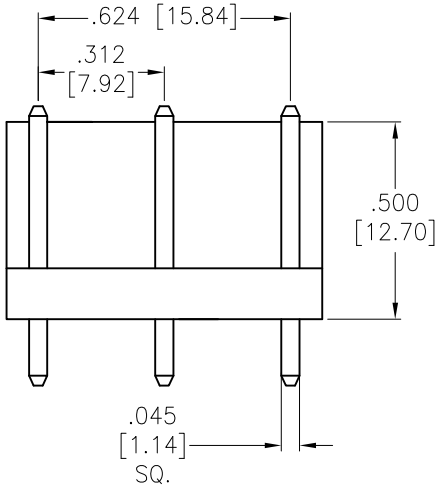

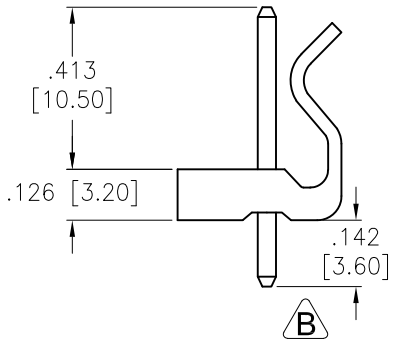

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-2

Insulator color: White

Contacts: Brass

Plating:

Tin over Copper underplate overall

Electrical:

Voltage rating: 250 V AC, DC

Current rating: 5 A AC, DC

Insulation resistance: 1000Mohms min.

Dielectric withstanding voltage: 1500 VAC for 1 minute

Temperature Rating:

-25°C to +85°C

Environmental:

Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	ØX	±.10
.XX	± .020	ØXX	±.015
.XXX	± .015	ØXXX	±.010

DRAWN	AY	10/30/17
CHECKED	RT	10/30/17
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .156 [3.96] POWER HEADER, 5P STRAIGHT, WITH LOCK POLARIZER

SIZE	PART NO.	REV.
X	LHB-05-SA1-X02-X04	B

REF:	SCALE:	SHEET
S00016T	NTS	1 OF 1