

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/22/15	


APPROVED: _____


DATE: _____ TITLE: _____

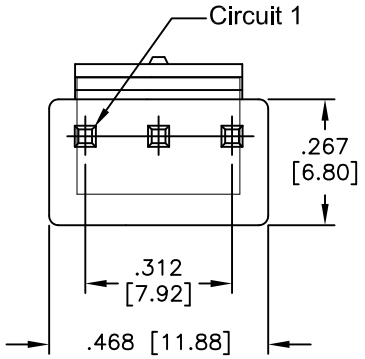

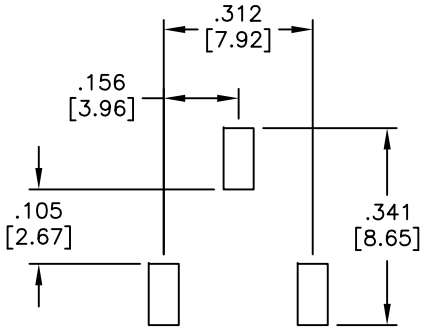

PCB LAYOUT

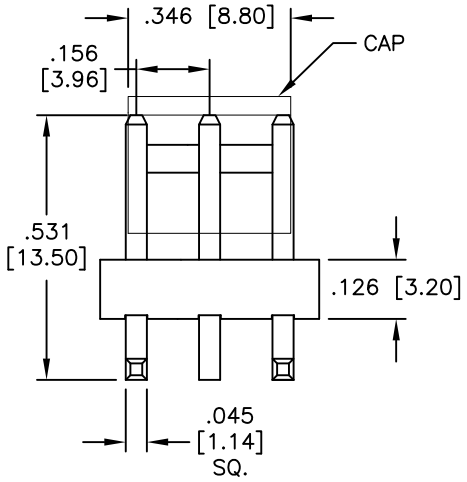

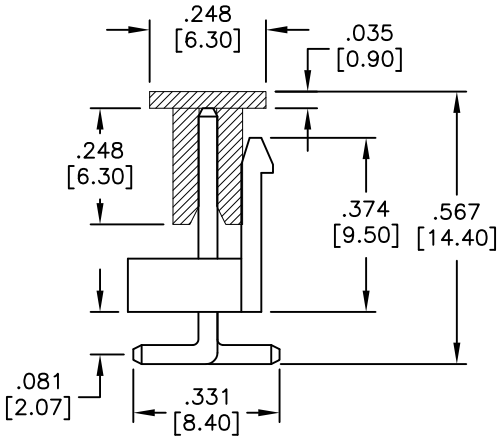

SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V–0
Insulator color: White
Contacts: Brass
Plating:
Tin over Copper underplate overall
Electrical:
Current rating: 3 Amp
Contact resistance: 20 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: –40°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	9/22/15
CHECKED	AC	9/22/15
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .156 [3.96] POWER HEADER, SMT STRAIGHT, WITH REAR LOCK

SIZE	PART NO.	REV.
X	LHC-03-TS-SMT-V0-B-PP-T/R	-

REF: S00111C | SCALE: NTS | SHEET 1 OF 1