

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/17/20	


APPROVED: _____

DATE: _____ TITLE: _____

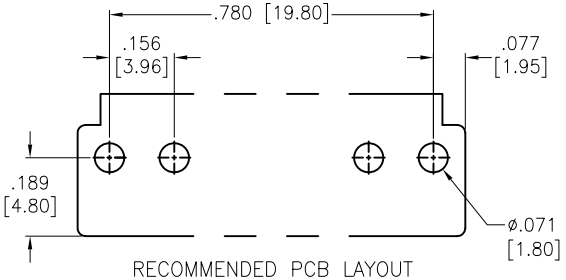



RECOMMENDED PCB LAYOUT

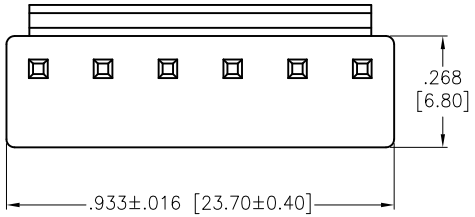

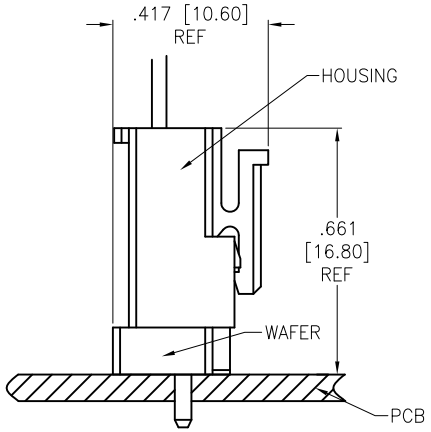

ASSEMBLY VIEW

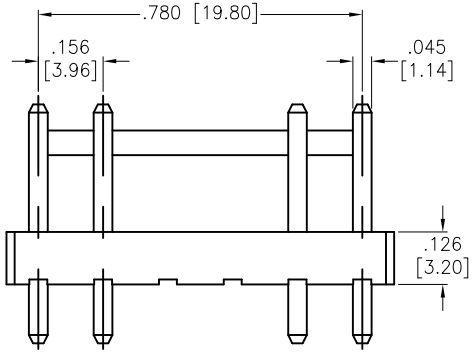

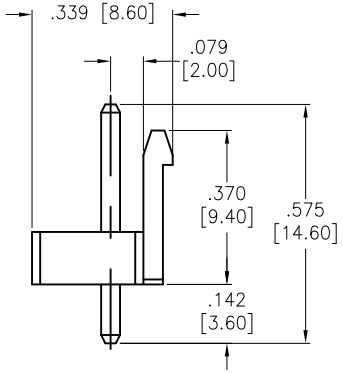

SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V-0
Insulator color: Natural
Contacts: Brass
Plating:
Tin over Copper underplate overall
Electrical:
Voltage rating: 250V AC/DC
Current rating: 7A AC/DC
Contact resistance: 20 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,500 VAC for 1 minute
Temperature Rating:
-25°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	LH	8/17/20
CHECKED	CC	8/17/20
APPROVED		

ADAM TECH
INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE .156 [3.96] POWER HEADER, STRAIGHT WITH REAR LOCK, 6P, REMOVED PIN #03, 04

SIZE	PART NO.	REV.
X	LHC-A1-06-TS-X03-X04-V0	-

REF: S00124T | SCALE: NTS | SHEET 1 OF 1