
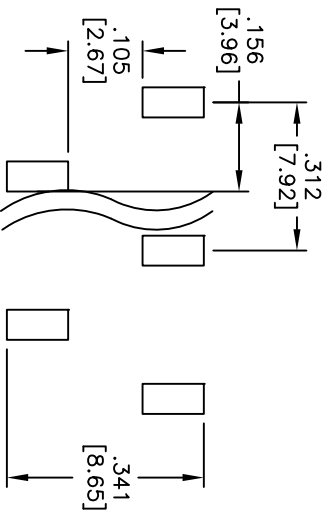




Rev	AWO #	Description	Date	Appr
-		RELEASED	6/7/13	

APPROVED: _____

DATE: _____ TITLE: _____

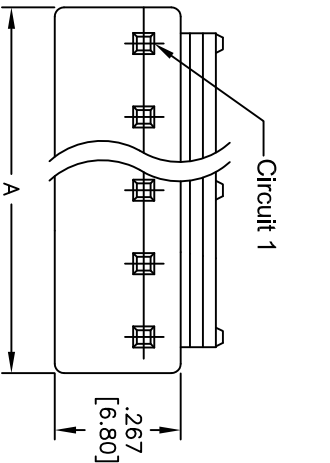

PCB LAYOUT

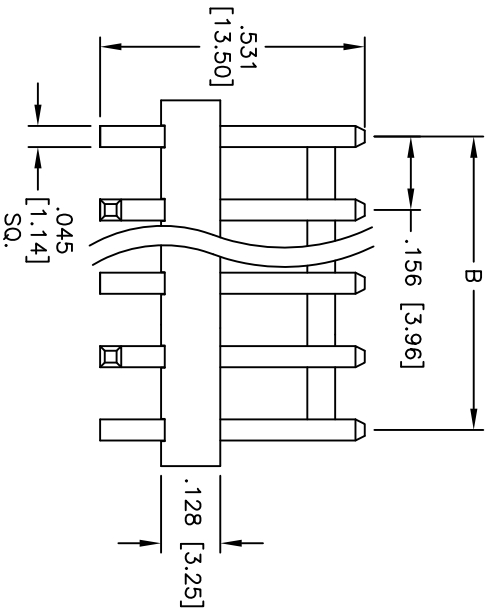

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-0

Insulator color: White

Contacts: Brass

Plating:

Tin over Copper underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 7 Amps max

Contact resistance: 10 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1,500 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant



Positions: 2 thru 12
A = .156 [3.96] x No. of Positions +.004 [0.09]
B = .156 [3.96] x No. of Spaces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

156 [3.96] POWER HEADER, SMT
STRAIGHT, WITH REAR LOCK

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				Holes			
.X	± .10	ØXX	± .10	.X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015	.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXX	± .010	.XXX	± .015	ØXXX	± .010
APPROVALS				DATE			
DRAWN	AY		6/7/13	SIZE	PART NO.	LHC-XX-TS-SMT-V0	REV.
CHECKED	YC		6/7/13	X			-
APPROVED				REF:	S00106C	SCALE: NTS	SHEET 1 OF 1