

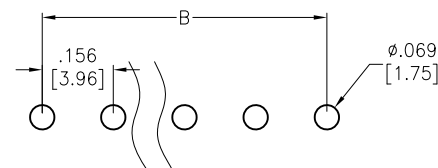
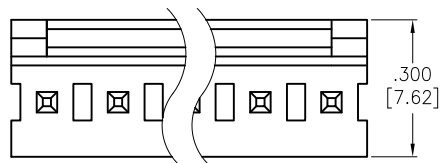


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/6/22	
A		UPDATE SPEC.	10/7/22	LH/TY

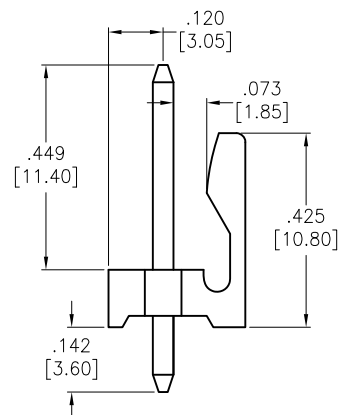

RECOMMENDED PCB LAYOUT

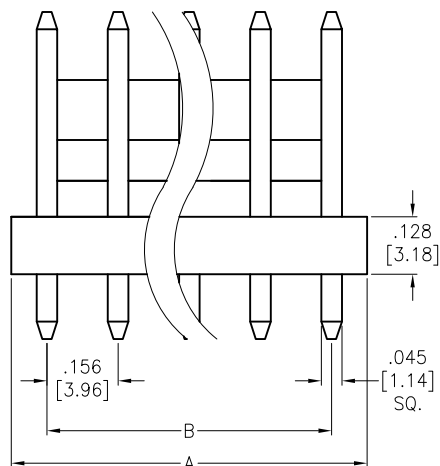

SPECIFICATIONS:

Material:
 Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
 Insulator color: Black 
 Contacts: Brass
 Plating:
 Matte Tin over Nickel underplate overall
 Electrical:
 Current rating: 7 Amp
 Contact Resistance: 20 mohms max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 1,000 VAC
 Temperature Rating:
 -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant 

Positions: 01 thru 40
 A = .156 [3.96] x No. of Positions
 B = .156 [3.96] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED			 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710		
.X ± .10	Ø.X ± .10				
.XX ± .020	Ø.XX ± .015				
.XXX ± .015	Ø.XXX ± .010				
DRAWN	LH	5/6/22	TITLE .156 [3.96] HEADER, STRAIGHT, TIN PLATED, HI-TEMP		
CHECKED	TY	5/6/22			
APPROVED					
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH			SIZE X	PART NO. LHD-A-XX-MTS-HT-V0	REV. A
			REF: S00111C	SCALE: NTS	SHEET 1 OF 1