

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/11/14	
A		ADDED OPERATING VOLTAGE RATING	10/7/15	
B		UPDATE P1 DIRECTION	12/7/15	AY/OC
C		UPDATE SPEC.	5/29/18	AY/SL
D		UPDATE DIM.	8/31/20	LH/EY

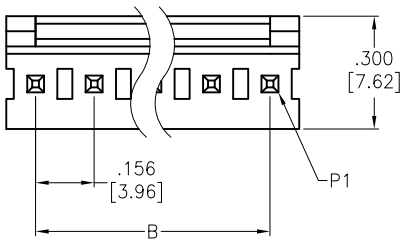

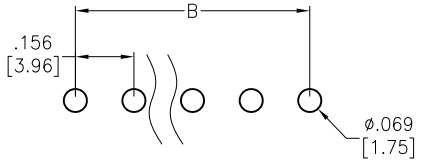

RECOMMENDED PCB LAYOUT

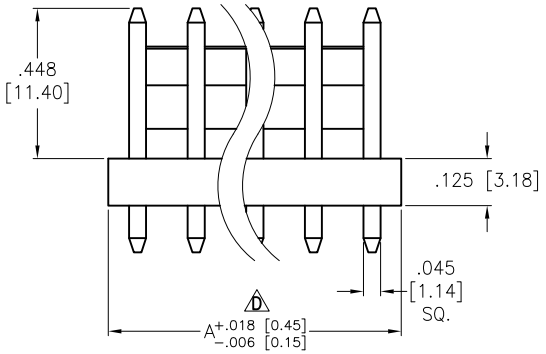

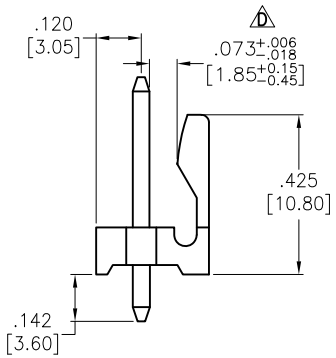

SPECIFICATIONS:

Material:

Insulator: Nylon PA66, rated UL 94V−0

Insulator color: White

Contacts: Brass

Plating:

Gold flash over Nickel underplate overall

Electrical:

Current rating: 7.0 Amp

Contact Resistance: 20 mohms max.

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: −40°C to +105°C

Environmental:

Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 2 thru 20

A = .156 [3.96] x No. of Positions

B = .156 [3.96] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	9/11/14
CHECKED	TW	9/11/14
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .156 [3.96] HEADER, STRAIGHT, GOLD FLASH PLATED

SIZE	PART NO.	REV.
X	LHD-XX-GS-V0	D

REF: S00019C | SCALE: NTS | SHEET 1 OF 1