


APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
1		PRELIMINARY	10/16/19	
-		RELEASED FOR PRODUCTION	12/01/21	TW

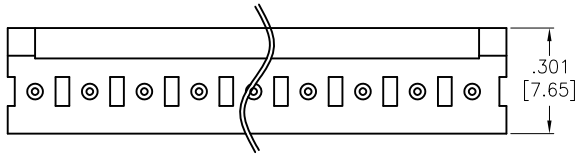

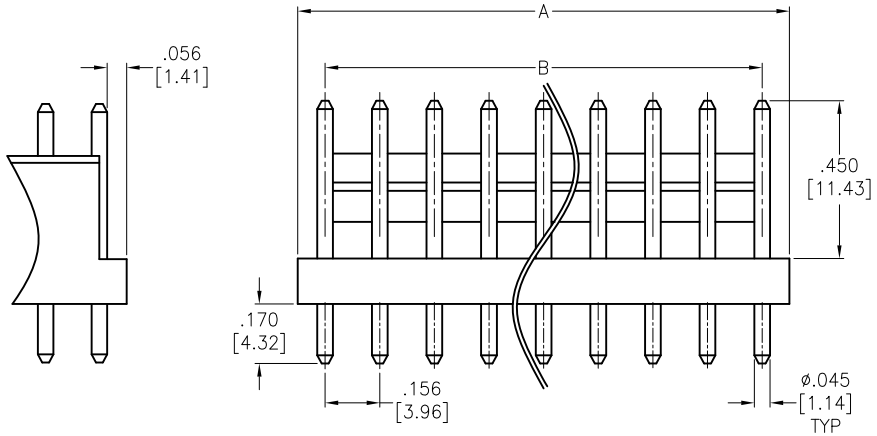



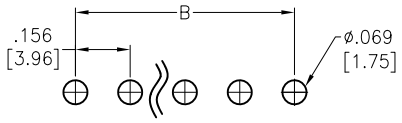

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:
Material:
Insulator: Nylon PA66, rated UL 94V–0
Insulator color: White
Contacts: Brass
Plating:
15u" Gold over Nickel underplate on contact area.
Electrical:
Current rating: 7 Amps max
Contact Resistance: 20 mohms max.
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
Operating temperature: –40°C to +85°C
Environmental:
Lead free, RoHS compliant RoHS COMPLIANT

Positions: 2 thru 12
A = .156 [3.96] x No. of Positions
B = .156 [3.96] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	10/16/19
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .156 [3.96] HEADER, STRAIGHT, ROUND PIN 15U" GOLD PLATED

SIZE	PART NO.	REV.
X	LHD-XX-GS-V0-RP-15	-

REF: S00181C | SCALE: NTS | SHEET 1 OF 1